# 1112 2" Wide General Purposes Caster Series

DERSHENG

Dersheng Casters Keep Rolling

W Resolute Wheel Diameter × Wheel Width 152 x 50mm

EAN


TW-4111206004042

Casters with Side Brakes and With locking system. Welded Caster Fork. Zine-Plated. Mounting Type - Top Plate. Reinforced, impact-resistant polypropylene Wheel Center with High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread. Dark gray. Bearings—Annual Ball Bearing.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

### Technical Data

● Metric ○ Imperial

Wheel Diameter 152mm

Wheel Width 50mm

Wheel Bearing Wheel With Annual Ball Bearing

Plate Size 115 x 100mm

Bolt Hole Spacing 85 x 70mm

Plate Hole 20 x 11mm

Offset 35mm

Swivel Interference 290mm

Overall Height 190mm

Swivel Radius 145mm

Hardness Of Tread 72±5° Shore A

Load Capacity (Dynamic) 272kgs

Load Capacity (Static) 408kgs

-

Temperature -20°C to +60°C

Fork Type Swivel Caster With Front Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 2.80kgs

Standard ISO22883

#### Advantages at a glance

Rolling Resistance


••••

Operating Noise


• • • •

Floor Surface Preservation • • • • •

## Dimensions

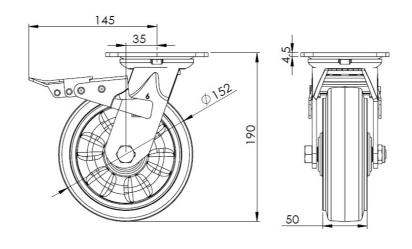

# Mounting

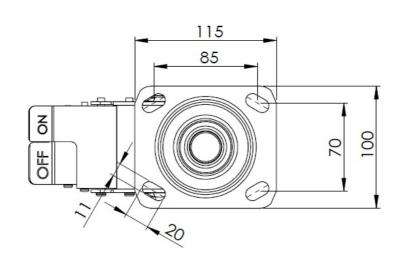

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.