1112 2" Wide General Purposes Caster Series

Dersheng Casters Keep Rolling

PU wheel (green) wheel diameter × wheel width 150 x 50.6mm


EAN

TW-4111206004045

Caster with front brake and With locking system. Welded Caster Fork. Zine-Plated. Mounting Type - Top Plate (with plastic cover). Cast Iron Wheel Center with High Quality Polyurethane Wheel Tread. Green color. Bearings—Annual Ball Bearings.

Wheel tread: high quality polyurethane Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 150mm
Wheel Width 50.6mm

Wheel Bearing Wheel With Annual Ball Bearing

Plate Size 115 x 100mm

Bolt Hole Spacing 85 x 70mm

Plate Hole 20 x 11mm

Offset 35mm

Swivel Interference 290mm

Overall Height 190mm

Swivel Radius 145mm

Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic) 410kgs
Load Capacity (Static) 615kgs

Temperature -20°C to +70°C

Fork Type Swivel Caster With Front Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 3.60kgs

Standard ISO22883

Advantages at a glance

Rolling Resistance


• • • 0

Operating Noise


• • •

Floor Surface Preservation • • • • •

Dimensions

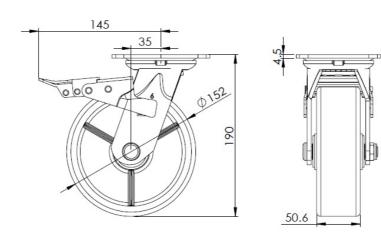

Mounting

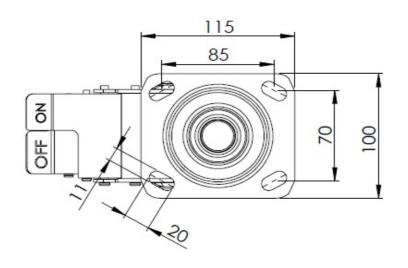

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.