1112 2" Wide General Purposes Caster Series

Dersheng Casters Keep Rolling

PU wheel (green) wheel diameter × wheel width 150 x 50.6mm


EAN

TW-4111206004045

Caster with front brake and With locking system. Welded Caster Fork. Zine-Plated. Mounting Type - Top Plate (with plastic cover). Cast Iron Wheel Center with High Quality Polyurethane Wheel Tread. Green color. Bearings—Annual Ball Bearings.

Wheel tread: high quality polyurethane Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Imperial ○ Metric

Wheel Diameter 6 "
Wheel Width 2 "

Wheel Bearing Wheel With Annual Ball Bearing

Plate Size 4-9/16 " x 4 "

Bolt Hole Spacing 3-3/8 " x 2-3/4 "

Plate Hole 13/16 x " 3/8 "

Offset 1-3/8 "

Swivel Interference 290

Overall Height 7-1/2 "

Swivel Radius 5-13/16 "

Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic) 904lbs

Load Capacity (Static) 1356lbs

Temperature -4°F to +158°F

Fork Type Swivel Caster With Front Brake

StainlessN/AElectrical ConductivityN/AAnti-StaticN/AWeight7.9lbsStandardISO22883

Advantages at a glance


Rolling Resistance

Operating Noise


• • • 0

Floor Surface Preservation • • • • •

Dimensions

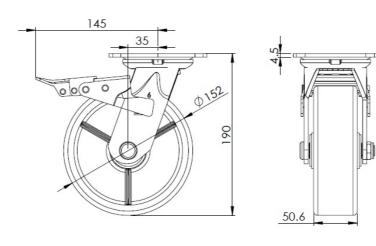

Mounting

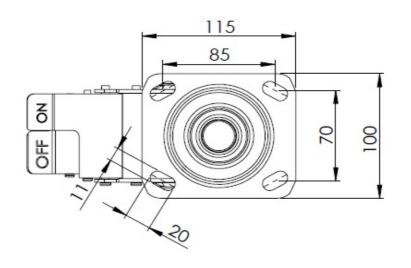

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.