1112 2" Wide General Purposes Caster Series

Dersheng Casters Keep Rolling

Rubber (black) Wheel Diameter × Wheel Width 150 x 50mm


EAN

TW-4111206004060

Casters with front brake and With locking system. Welded Caster Fork. Zine-Plated. Mounting Type - Top Plate. Cast Iron Wheel Center with High-Quality Resilient Rubber Wheel Tread. Black. Bearings—Annual Ball Bearings.

Wheel surface: high-quality elastic rubber Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Imperial ○ Metric

Wheel Diameter 6 "
Wheel Width 2 "

Wheel Bearing Wheel With Annual Ball Bearing

Plate Size 4-9/16 " x 4 "

Bolt Hole Spacing 3-3/8 " x 2-3/4 "

Plate Hole 13/16 x " 3/8 "

Offset 1-3/8 "

Swivel Interference 11-1/2 "

Overall Height 7-1/2 "

Swivel Radius 5-13/16 "

Hardness Of Tread 80±5° Shore A

Load Capacity (Dynamic) 551lbs

Load Capacity (Static) 827lbs

Temperature -4°F to +248°F

Fork Type Swivel Caster With Front Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A


Weight 7.5lbs

Standard ISO22883


Advantages at a glance

Floor Surface Preservation • • • • ○

Dimensions

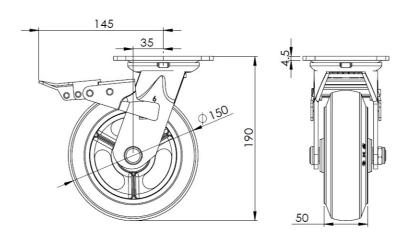

Mounting

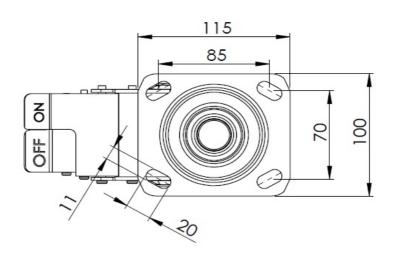

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.