


## 1112 2" Wide General Purposes Caster Series

PU (red) Wheel Diameter x Wheel Width 150 x 49mm

EAN

TW-4111206004063

Casters with Side Brakes and With locking system. Welded Caster Fork. Zinc-Plated. Mounting Type - Top Plate. Cast Iron core with High Quality Polyurethane Wheel Tread. Cast Iron red. Bearings—Annual Ball Bearings.

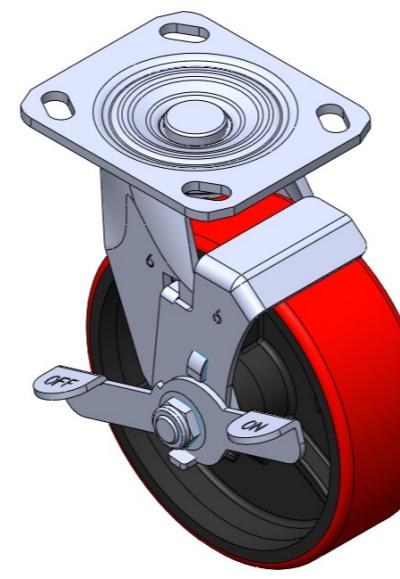

Wheel tread: high quality polyurethane  
Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product

Picture may differ from original product

## Technical Data

 Metric  Imperial

Wheel Diameter 150mm

Wheel Width 49mm

Wheel Bearing Wheel With Annual Ball Bearing

Plate Size 115 x 100mm

Bolt Hole Spacing 85 x 70mm

Plate Hole 20 x 11mm

Offset 35mm

Swivel Interference 220mm

Overall Height 190mm

Swivel Radius 110mm

Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic) 410kgs

Load Capacity (Static) 615kgs

Temperature -20°C to +70°C

Fork Type Swivel Caster With Side Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 3.20kgs

Standard ISO22883


## Advantages at a glance

Rolling Resistance • • • ○ ○


Operating Noise • • • • ○

Floor Surface Preservation • • • • ○

## Dimensions

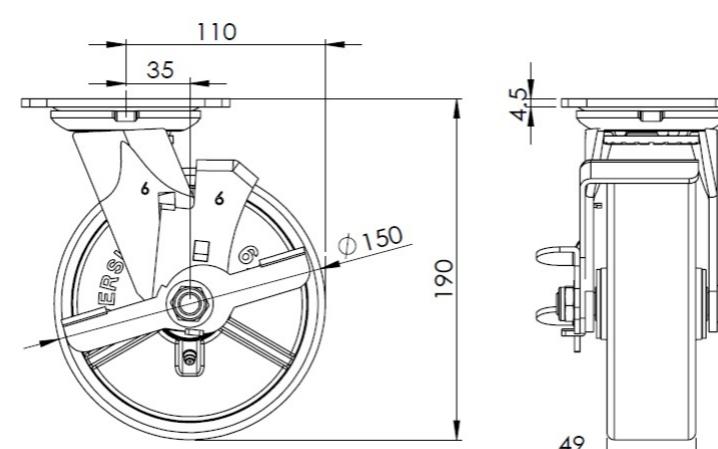

## Mounting

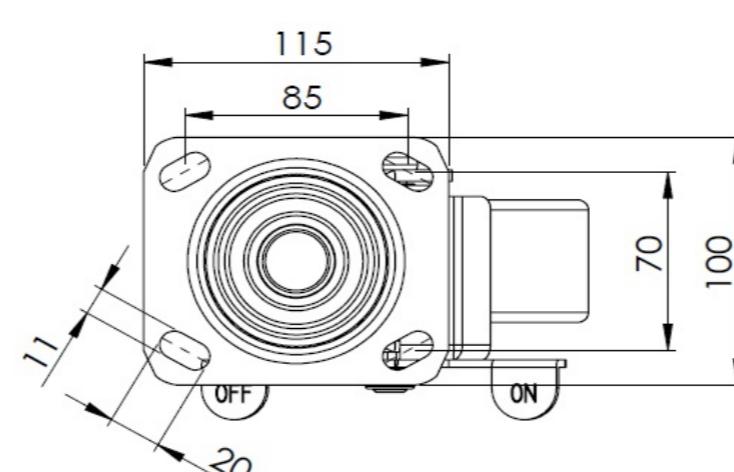

\* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com