

## 1112 2" Wide General Purposes Caster Series

PU (red) Wheel Diameter x Wheel Width 150 x 49mm


EAN

TW-4111206004064

Casters with front brake and With locking system. Welded Caster Fork. Zinc-Plated. Mounting Type - Top Plate. Cast Iron Wheel Center with High Quality Polyurethane Wheel Tread. Cast Iron red. Bearings—Annual Ball Bearings.

Wheel tread: high quality polyurethane  
Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product

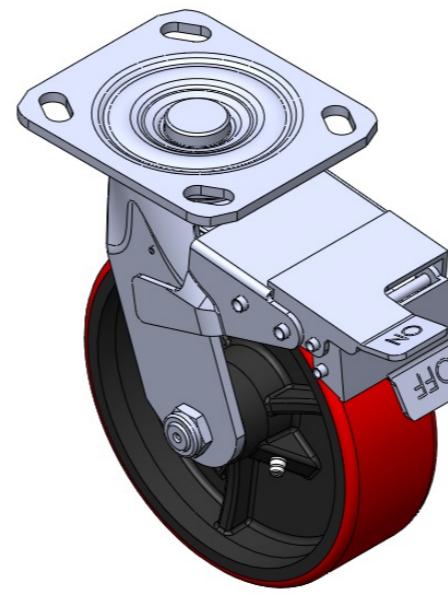

Picture may differ from original product

## Technical Data

 Imperial  Metric

Wheel Diameter 6 "

Wheel Width 2 "

Wheel Bearing Wheel With Annual Ball Bearing

Plate Size 4-9/16 " x 4 "

Bolt Hole Spacing 3-3/8 " x 2-3/4 "

Plate Hole 13/16 x " 3/8 "

Offset 1-3/8 "

Swivel Interference 11-1/2 "

Overall Height 7-1/2 "

Swivel Radius 5-13/16 "

Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic) 904lbs

Load Capacity (Static) 1356lbs

Temperature -4°F to +158°F

Fork Type Swivel Caster With Front Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 7.9lbs

Standard ISO22883


## Advantages at a glance

Rolling Resistance • • • ○ ○


Operating Noise • • • • ○

Floor Surface Preservation • • • • ○

## Dimensions

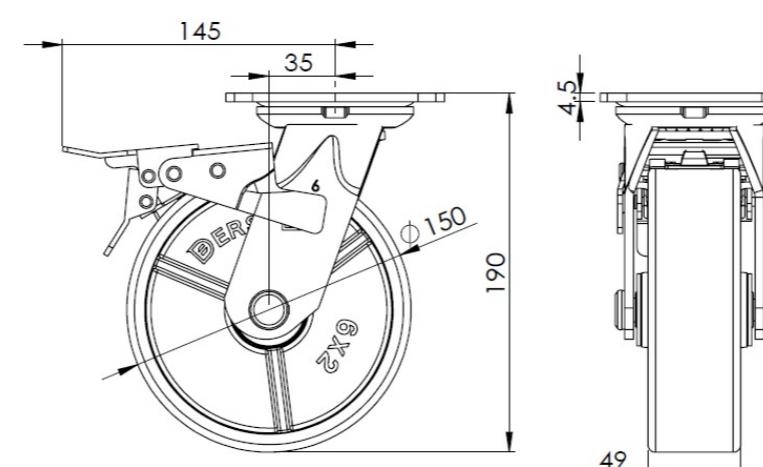

## Mounting

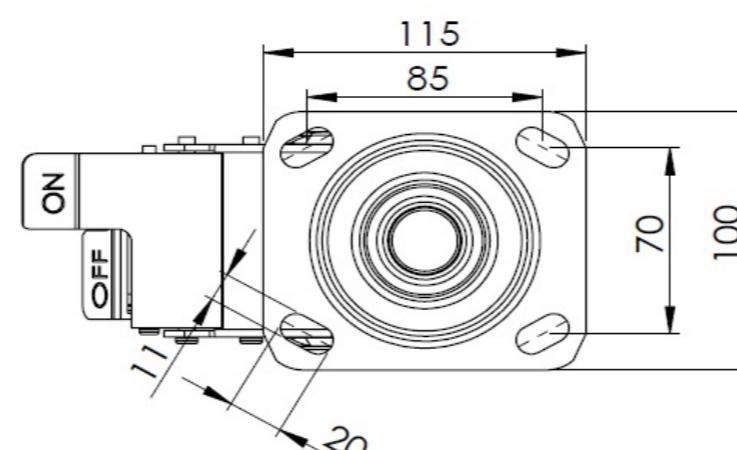

\* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com