## 1112 2" Wide General Purposes Caster Series

Dersheng Casters Keep Rolling

W Resolute(gray) Wheel Diameter × Wheel Width 200 x 50mm

EAN


TW-4111208001023

Rigid Caster with Welded Caster Fork Zine-Plated, Mounting Type - Top Plate Reinforced, impact-resistant High-quality Impact Resistance Polypropylene Wheel Center with High-Quality Thermoplastic Rubber (TPR) tread Gray color, Bearing—precision long bead.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

## Technical Data

Wheel Width

● Metric ○ Imperial

Wheel Diameter

Wheel Bearing Wheel With Annual Ball Bearing

200mm

50mm

Plate Size 115 x 100mm

Bolt Hole Spacing 85 x 70mm

Plate Hole 20 x 11mm

Overall Height 240mm

Hardness Of Tread 72±5° Shore A

Load Capacity (Dynamic) 306kgs

Load Capacity (Static) 460kgs

Temperature -20°C to +60°C

Fork Type Rigid Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A
Weight 2.0kgs
Standard ISO22883

## Advantages at a glance

Rolling Resistance


• • • • •


**Operating Noise** 

• • • •


Floor Surface Preservation • • • • •

## Dimensions





Mounting

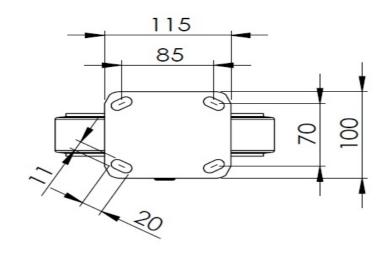

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.