


1112 2" Wide General Purposes Caster Series

Resolute Rubber Wheel Diameter x Wheel Width 200 x 50mm

EAN

TW-4111208004029

Equipped with side-braking, locking Casters. Welded Caster Fork. Zinc-Plated, Mounting Type - Top Plate. High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) wheel rim. Gray color, Bearing—Annual Ball Bearings.

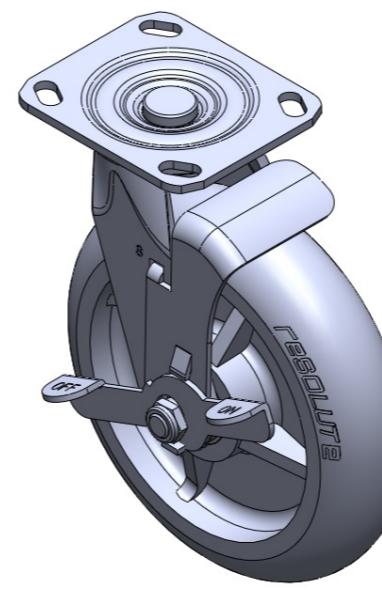

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product

Picture may differ from original product

Technical Data

 Metric Imperial

Wheel Diameter 200mm

Wheel Width 50mm

Wheel Bearing Wheel With Annual Ball Bearing

Plate Size 115 x 100mm

Bolt Hole Spacing 85 x 70mm

Plate Hole 20 x 11mm

Offset 45mm

Swivel Interference 290mm

Overall Height 240mm

Swivel Radius 145mm

Hardness Of Tread 72±5° Shore A

Load Capacity (Dynamic) 272kgs

Load Capacity (Static) 408kgs

Temperature -20°C to +60°C

Fork Type Swivel Caster With Side Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 2.60kgs

Standard ISO22883


Advantages at a glance

Rolling Resistance •••••


Operating Noise •••••

Floor Surface Preservation •••••

Dimensions

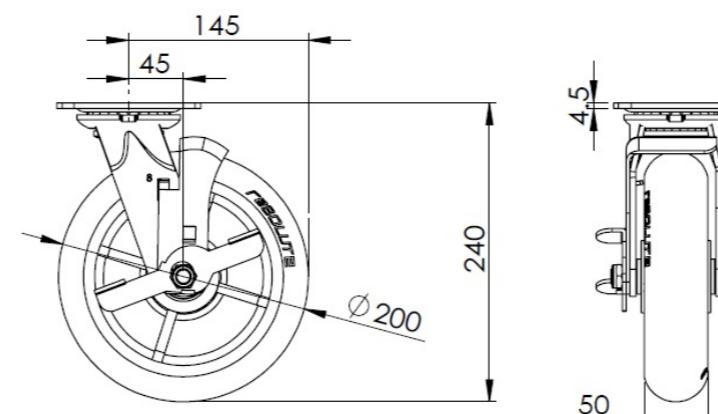

Mounting

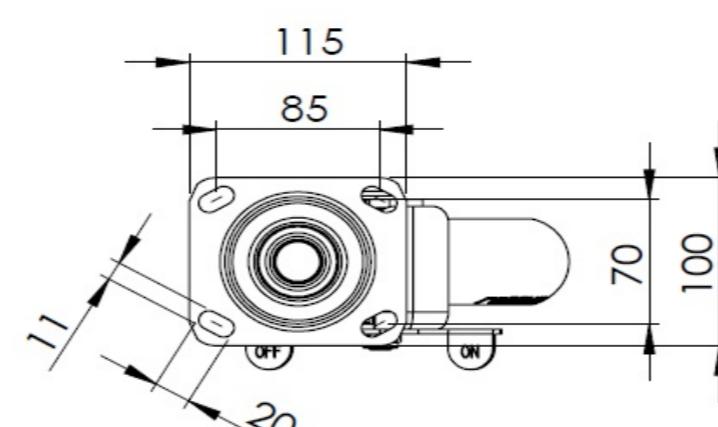

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com