


1116-SS-LI Light Duty Stainless Steel Caster Series

Nylon Wheel Diameter x Wheel Width 50 x 25mm

EAN

TW-411602001002

Rigid Casters, Stamping Fabricated Caster Fork; surface vibration, Mounting Type - Top Plate device; thermoplastic Wheel Center and Wheel Tread; white, Plain Bearings.

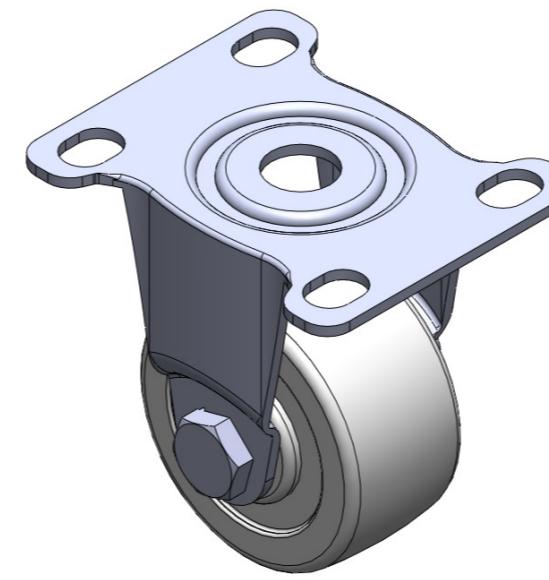

Wheel surface: made of thermoplastic plastic
Wheel Center: made of thermoplastic plastic

Drawings are for reference only and may differ from the product

Picture may differ from original product

Technical Data

Metric Imperial

Wheel Diameter 50mm

Wheel Width 25mm

Wheel Bearing Wheel With Plain Bearing

Plate Size 70 x 58mm

Bolt Hole Spacing 55 x 38.5mm

Plate Hole 12 x 9mm

Overall Height 70mm

Hardness Of Tread 75±5° Shore D

Load Capacity (Dynamic) 70kgs

Load Capacity (Static) 105kgs

Temperature -20°C to +80°C

Fork Type Rigid Caster

Stainless Y

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.17kgs

Standard ISO22883


Advantages at a glance

Rolling Resistance • • • •


Operating Noise • • ○ ○ ○

Floor Surface Preservation • • ○ ○ ○

Dimensions

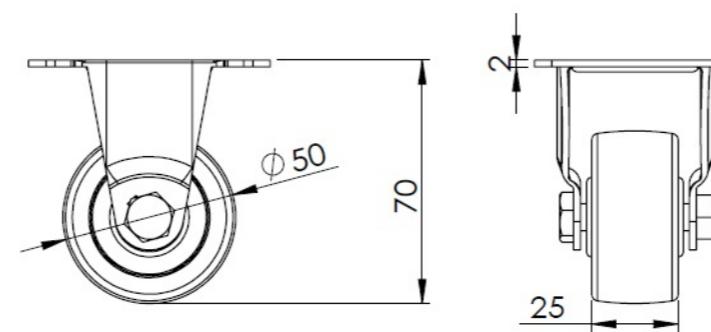

Mounting

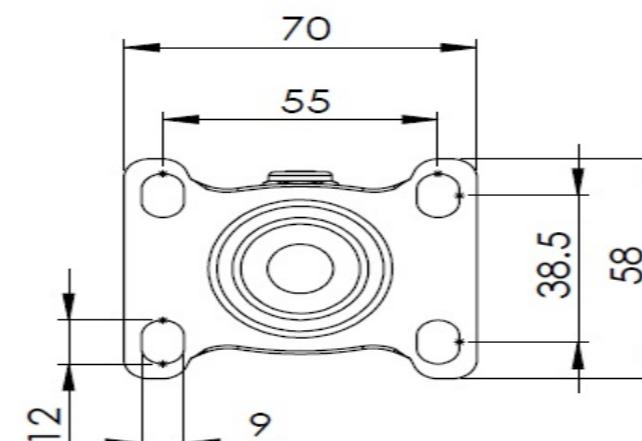

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com