


## 1116-SS-LI Light Duty Stainless Steel Caster Series

Nylon Wheel Diameter x Wheel Width 50 x 25mm

EAN

TW-4111602002005

Swivel Casters, Riveted and Stamping Fork. Surface vibration, Mounting Type - Top Plate device. Reinforced Polypropylene and Wheel Tread. Black, Plain Bearings.

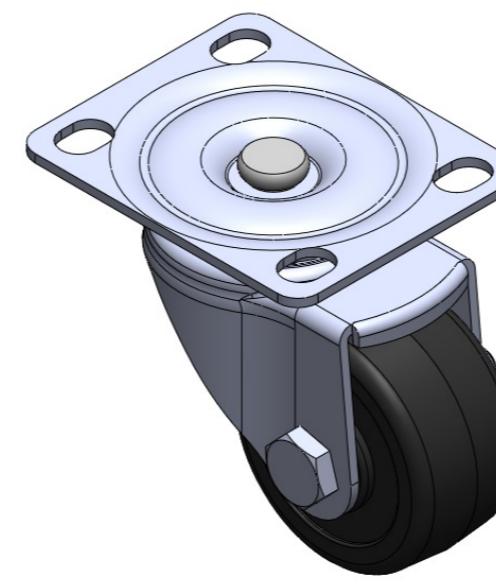

Picture may differ from original product

Wheel surface: made of thermoplastic plastic  
Wheel Center: made of thermoplastic plastic

Drawings are for reference only and may differ from the product

## Technical Data


Imperial  Metric

Wheel Diameter	2 "
Wheel Width	1 "
Wheel Bearing	Wheel With Plain Bearing
Plate Size	2-13/16 " x 2-5/16 "
Bolt Hole Spacing	2-1/8 " x 1-1/2 "
Plate Hole	1/2 " x 3/8 "
Offset	1-1/16 "
Swivel Interference	4 "
Overall Height	2-13/16 "
Swivel Radius	2 "
Hardness Of Tread	75±5° Shore D
Load Capacity (Dynamic)	154lbs
Load Capacity (Static)	231lbs
Temperature	-4°F to +176°F
Fork Type	Swivel Caster
Stainless	Y
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.6lbs
Standard	ISO22883


## Advantages at a glance

Rolling Resistance	• • • •
Operating Noise	• • ○ ○ ○
Floor Surface Preservation	• • ○ ○ ○

## Dimensions

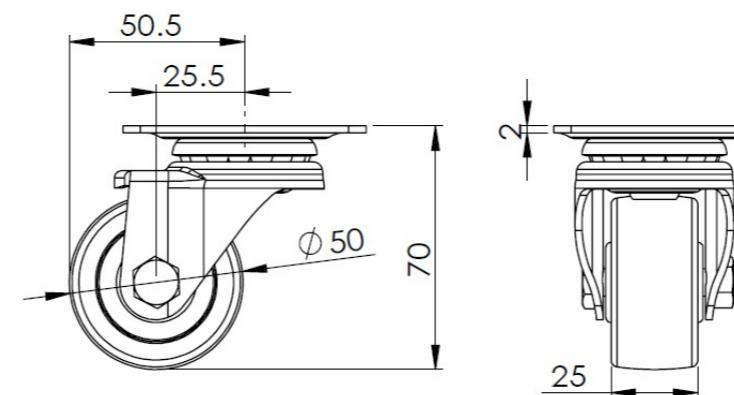

## Mounting

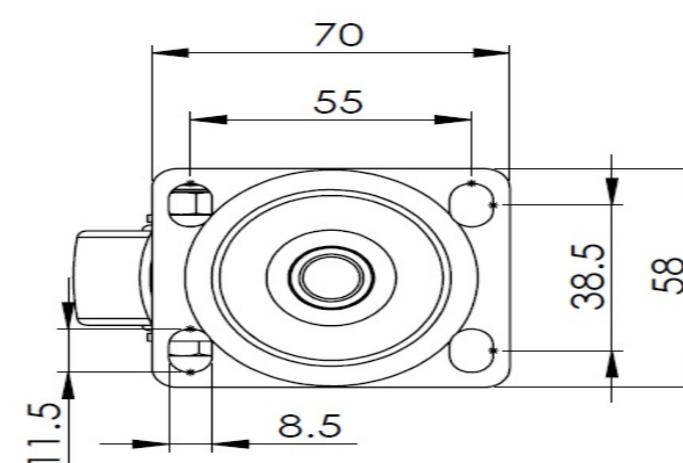

\* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com