

1116-SS-MI Medium Duty Institutional Stainless Steel Caster Series




Rubber Wheel Diameter x Wheel Width 75 x 31mm

EAN

TW-4111603001002

Rigid Casters, Stamping Fabricated Caster Fork — high-grade perforated design
 Surface vibration damping, Mounting Type - Top Plate device High-Quality Resilient
 Rubber Wheel Center and surface Black, wheels — Plain Bearing.

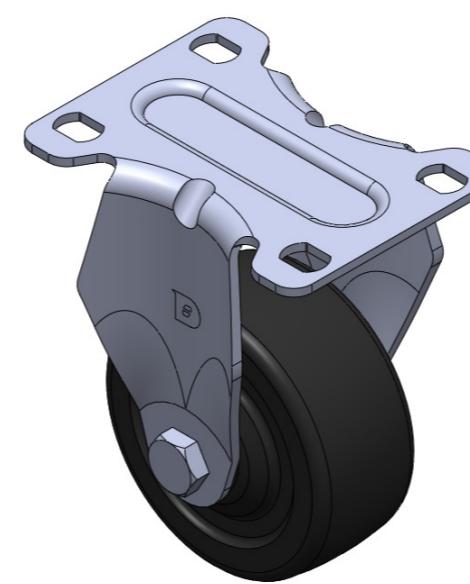

High-quality elastic rubber
 High-quality elastic rubber

Drawings are for reference only and may differ from the product

Picture may differ from original product

Technical Data


Metric Imperial

Wheel Diameter	75mm
Wheel Width	31mm
Wheel Bearing	Wheel With Plain Bearing
Plate Size	92 x 70mm
Bolt Hole Spacing	75 x 45mm
Plate Hole	12 x 9mm
Overall Height	112.5mm
Hardness Of Tread	80±5° Shore A
Load Capacity (Dynamic)	70kgs
Load Capacity (Static)	105kgs
Temperature	-20°C to +120°C
Fork Type	Rigid Caster
Stainless	Y
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.45kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ○ ○
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ○

Dimensions

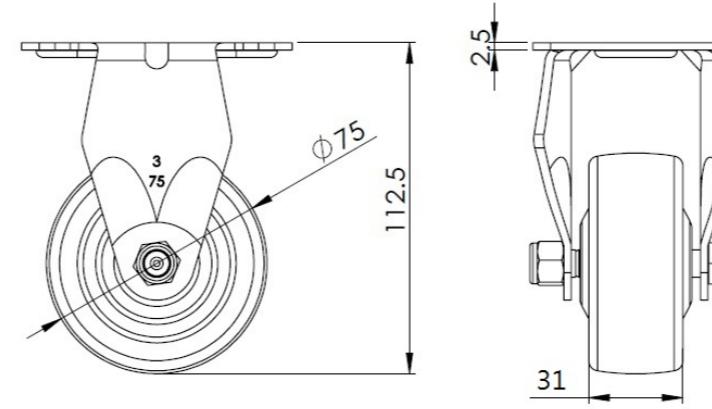

Mounting

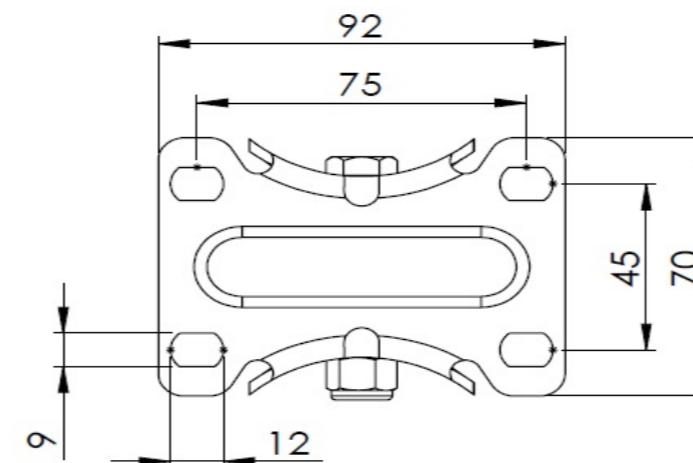

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com