

1116-SS-MI Medium Duty Institutional Stainless Steel Caster Series




Rubber Wheel Diameter x Wheel Width 75 x 31mm

EAN

TW-4111603001002

Rigid Casters, Stamping Fabricated Caster Fork — high-grade perforated design
 Surface vibration damping, Mounting Type - Top Plate device High-Quality Resilient
 Rubber Wheel Center and surface Black, wheels — Plain Bearing.

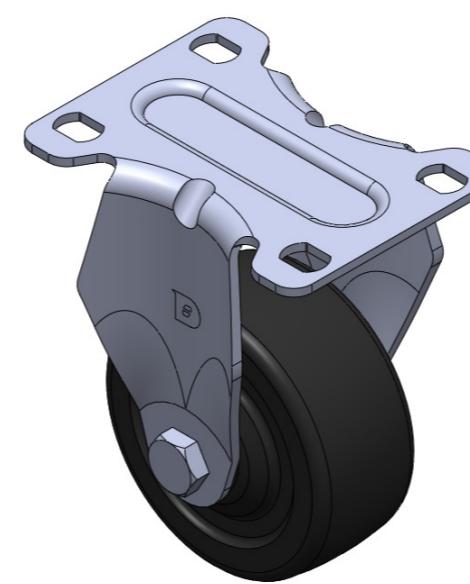

High-quality elastic rubber
 High-quality elastic rubber

Drawings are for reference only and may differ from the product

Picture may differ from original product

Technical Data

Imperial Metric

Wheel Diameter 3 "

Wheel Width 1-1/4 "

Wheel Bearing Wheel With Plain Bearing

Plate Size 3-5/8 " x 2-13/16 "

Bolt Hole Spacing 3 " x 1-13/16 "

Plate Hole 1/2 " x 23/64 "

Overall Height 4-1/2 "

Hardness Of Tread 80±5° Shore A

Load Capacity (Dynamic) 154lbs

Load Capacity (Static) 231lbs

Temperature -4°F to +248°F

Fork Type Rigid Caster

Stainless Y

Electrical Conductivity N/A

Anti-Static N/A

Weight 1.0lbs

Standard ISO22883


Advantages at a glance

Rolling Resistance • • • ○ ○


Operating Noise • • • • ○

Floor Surface Preservation • • • • ○

Dimensions

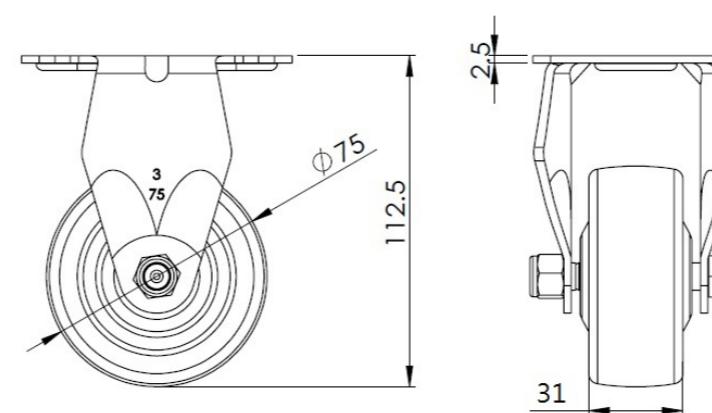

Mounting

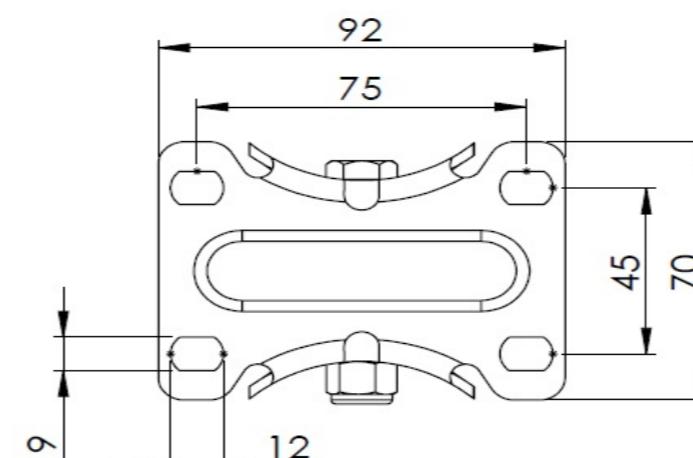

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com