

1116-SS-MI Medium Duty Institutional Stainless Steel Caster Series




AQPU (blue) Wheel Diameter × Wheel Width 75 x 31mm

EAN  
TW-4111603001031

Rigid Casters, Stamping Fabricated Caster Fork — high-grade perforated design  
Surface vibration, Mounting Type - Top Plate Aluminum wheel center, High Quality  
Polyurethane Wheel Tread Blue finish, Bearing — Ball Bearings.

Wheel surface: High-quality polyurethane  
Wheel Center: Aluminum core

Drawings are for reference only and may differ from the product

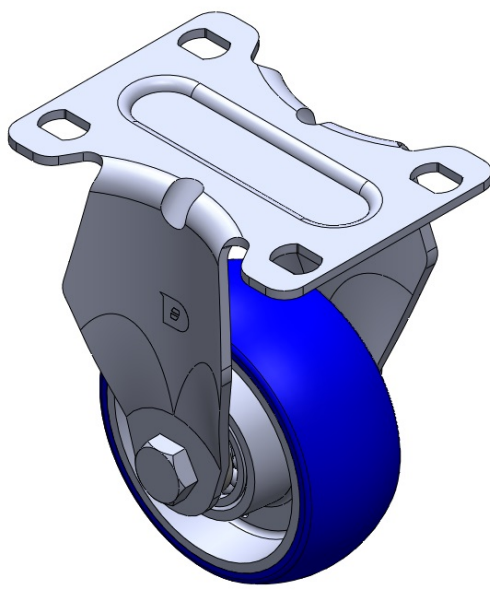

Picture may differ from original product


Technical Data

|                                                                        |                           |
|------------------------------------------------------------------------|---------------------------|
| <input checked="" type="radio"/> Metric <input type="radio"/> Imperial |                           |
| Wheel Diameter                                                         | 75mm                      |
| Wheel Width                                                            | 31mm                      |
| Wheel Bearing                                                          | Wheels With Ball Bearings |
| Plate Size                                                             | 92 x 70mm                 |
| Bolt Hole Spacing                                                      | 75 x 45mm                 |
| Plate Hole                                                             | 12 x 9mm                  |
| Overall Height                                                         | 112.5mm                   |
| Hardness Of Tread                                                      | 87±5° Shore A             |
| Load Capacity (Dynamic)                                                | 125kgs                    |
| Load Capacity (Static)                                                 | 187.5kgs                  |
| Temperature                                                            | -20°C to +70°C            |
| Fork Type                                                              | Rigid Caster              |
| Stainless                                                              | Y                         |
| Electrical Conductivity                                                | N/A                       |
| Anti-Static                                                            | N/A                       |
| Weight                                                                 | 0.45kgs                   |
| Standard                                                               | ISO22883                  |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ● ● |
| Operating Noise            | ● ● ● ● ● |
| Floor Surface Preservation | ● ● ● ● ● |

Dimensions

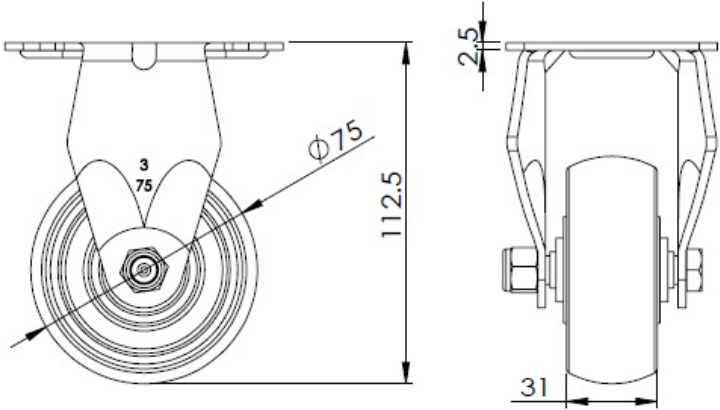

Mounting

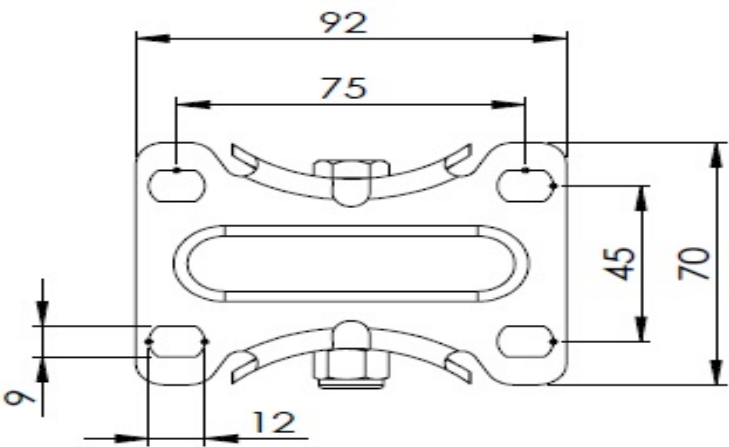

\* For any deviation between metric and imperial spec, please refer to the metric spec.