


## 1116-SS-LI Light Duty Stainless Steel Caster Series

Nylon Wheel Diameter x Wheel Width 75 x 45mm

EAN

TW-4111603001032

Rigid Casters, Stamping Fabricated Caster Fork; surface vibration, Mounting Type - Top Plate device; thermoplastic Wheel Center and Wheel Tread; black; Bearing—Ball Bearings.

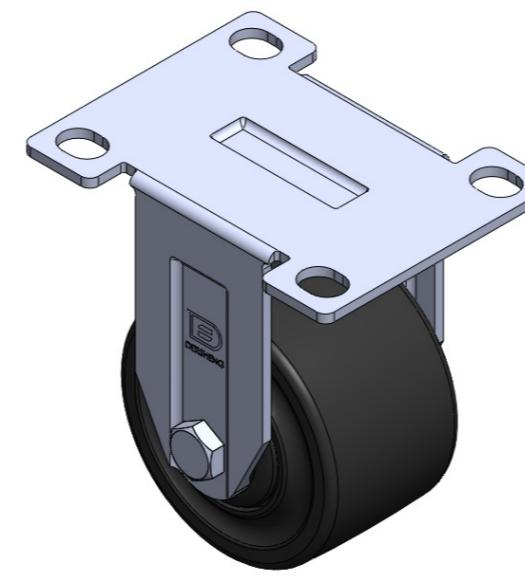

Wheel surface: thermoplastic  
Wheel Center: thermoplastic

Drawings are for reference only and may differ from the product

Picture may differ from original product

## Technical Data

Metric  Imperial

Wheel Diameter 75mm

Wheel Width 45mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 105 x 80mm

Bolt Hole Spacing 83 x 60mm

Plate Hole 14 x 11mm

Overall Height 108mm

Hardness Of Tread 75±5° Shore D

Load Capacity (Dynamic) 300kgs

Load Capacity (Static) 450kgs

Temperature -20°C to +80°C

Fork Type Rigid Caster

Stainless Y

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.50kgs

Standard ISO22883


## Advantages at a glance

Rolling Resistance • • • •


Operating Noise • • ○ ○ ○

Floor Surface Preservation • • ○ ○ ○

## Dimensions

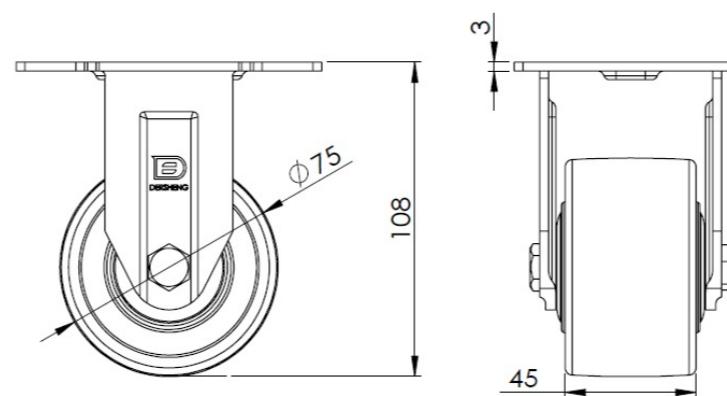

## Mounting

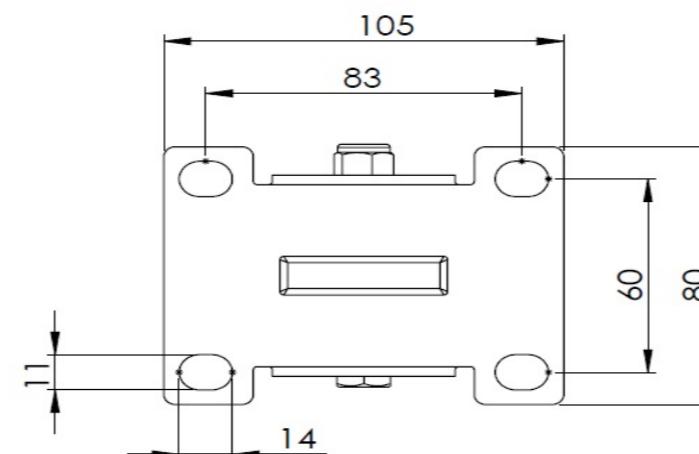

\* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com