


1116-SS-LI Light Duty Stainless Steel Caster Series

Nylon Wheel Diameter x Wheel Width 75 x 45mm

EAN

TW-4111603001032

Rigid Casters, Stamping Fabricated Caster Fork; surface vibration, Mounting Type - Top Plate device; thermoplastic Wheel Center and Wheel Tread; black; Bearing—Ball Bearings.

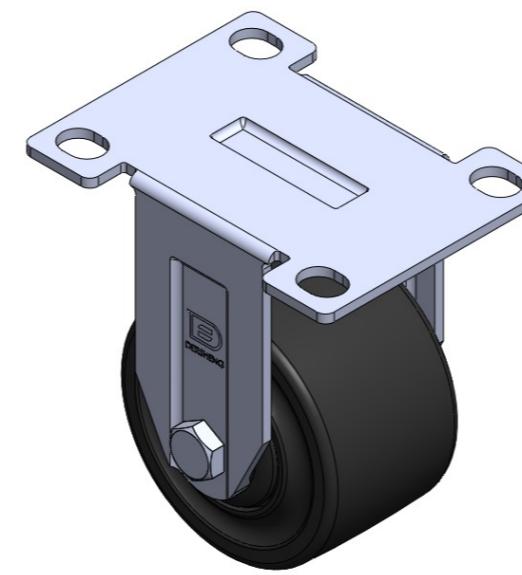

Wheel surface: thermoplastic
Wheel Center: thermoplastic

Drawings are for reference only and may differ from the product

Picture may differ from original product

Technical Data

Imperial Metric

Wheel Diameter 3 "

Wheel Width 1-13/16 "

Wheel Bearing Wheels With Ball Bearings

Plate Size 4-3/16 " x 3-3/16 "

Bolt Hole Spacing 2-1/4 " x 2-3/8 "

Plate Hole 9/16 " x 3/8 "

Overall Height 4-5/16 "

Hardness Of Tread 75±5° Shore D

Load Capacity (Dynamic) 661lbs

Load Capacity (Static) 992lbs

Temperature -4°F to +176°F

Fork Type Rigid Caster

Stainless Y

Electrical Conductivity N/A

Anti-Static N/A

Weight 1.1lbs

Standard ISO22883


Advantages at a glance

Rolling Resistance • • • •


Operating Noise • • ○ ○ ○

Floor Surface Preservation • • ○ ○ ○

Dimensions

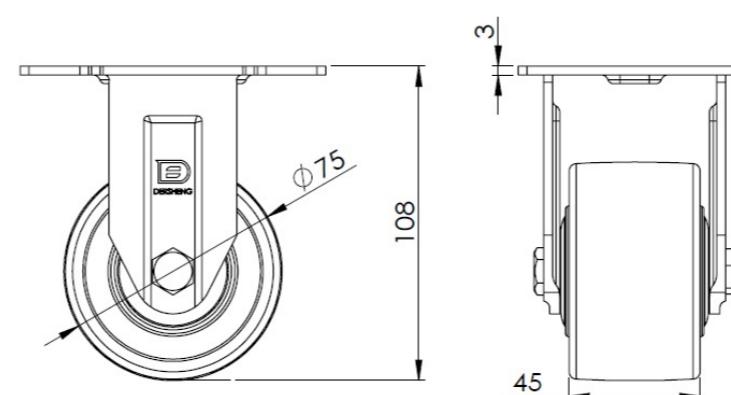

Mounting

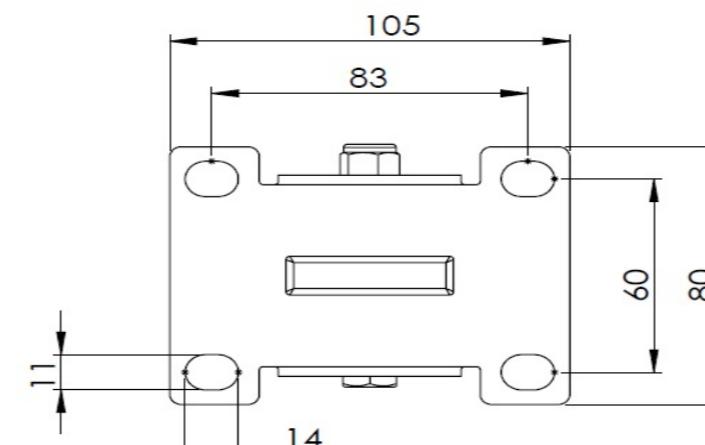

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com