

1116-SS-MI Medium Duty Institutional Stainless Steel Caster Series




WMRC (Transparent) Wheel Diameter × Wheel Width 75 x 31mm

EAN
TW-4111603002032

Swivel Casters, Single Bolthole Stamping Fork—hollow Ø12.2 hole Surface vibration, interlocking Mounting Type device Reinforced thermoplastic Wheel Center and Wheel Tread White, Bearing—Ball Bearings.

Wheel surface: Thermoplastic
Wheel hub: Thermoplastic

Drawings are for reference only and may differ from the product

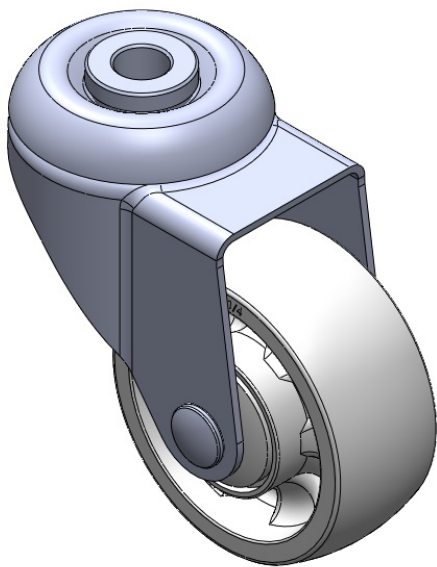

Picture may differ from original product


Technical Data

☒ Imperial ☐ Metric	
Wheel Diameter	3 "
Wheel Width	1-1/4 "
Wheel Bearing	Wheels With Ball Bearings
Single Bolt HoleCentre Hole	1/2 "
Offset	1-11/16 "
Swivel Interference	6-5/16 "
Overall Height	4-1/4 "
Swivel Radius	3-1/8 "
Hardness Of Tread	75±5° Shore D
Load Capacity (Dynamic)	353lbs
Load Capacity (Static)	529lbs
Temperature	-4°F to +176°F
Fork Type	Swivel Caster
Stainless	Y
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	1.1lbs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ● ●
Operating Noise	● ● ○ ○ ○
Floor Surface Preservation	● ● ○ ○ ○

Dimensions

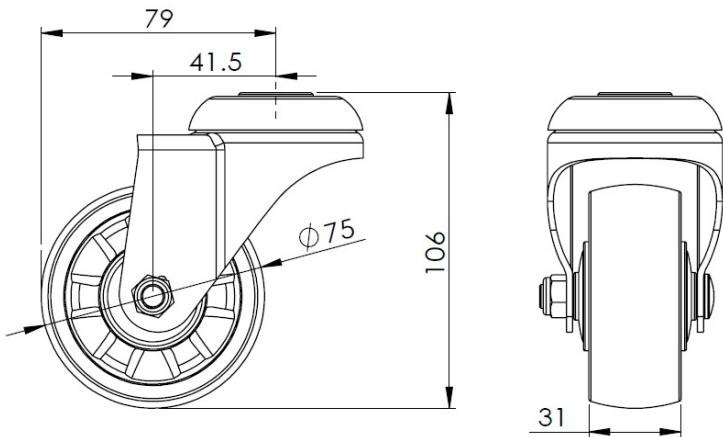

Mounting

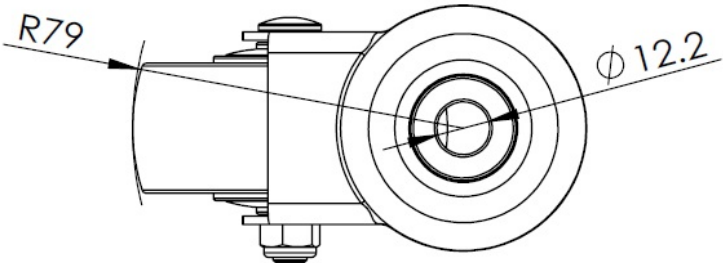

* For any deviation between metric and imperial spec, please refer to the metric spec.