

1116-SS-LI Light Duty Stainless Steel Caster Series

Nylon Wheel Diameter x Wheel Width 75 x 45mm


EAN

TW-4111603002072

Swivel Casters, Riveted and Stamping Top Plate. Surface vibration, Mounting Type - Top Plate device. Reinforced Polypropylene and Wheel Tread. Black, Bearing—Ball Bearings.

Wheel surface: thermoplastic
Wheel Center: thermoplastic

Drawings are for reference only and may differ from the product

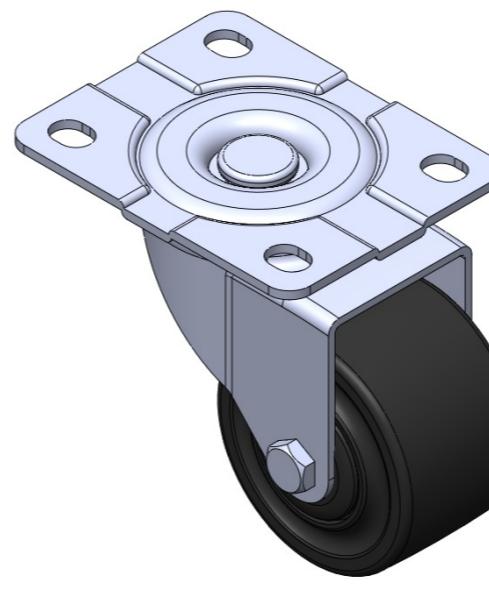

Picture may differ from original product

Technical Data

 Metric Imperial

Wheel Diameter 75mm

Wheel Width 45mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 110 x 86mm

Bolt Hole Spacing 83 x 60mm

Plate Hole 14 x 11mm

Offset 42.5mm

Swivel Interference 160mm

Overall Height 106mm

Swivel Radius 80mm

Hardness Of Tread 75±5° Shore D

Load Capacity (Dynamic) 300kgs

Load Capacity (Static) 450kgs

Temperature -20°C to +80°C

Fork Type Swivel Caster

Stainless Y

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.65kgs

Standard ISO22883


Advantages at a glance

Rolling Resistance • • • •


Operating Noise • • ○ ○ ○

Floor Surface Preservation • • ○ ○ ○

Dimensions

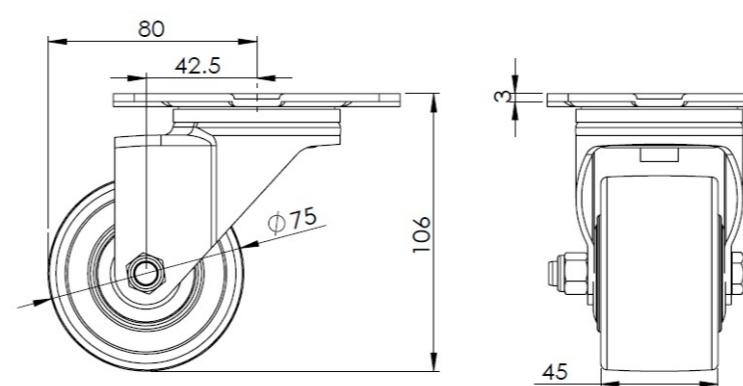

Mounting

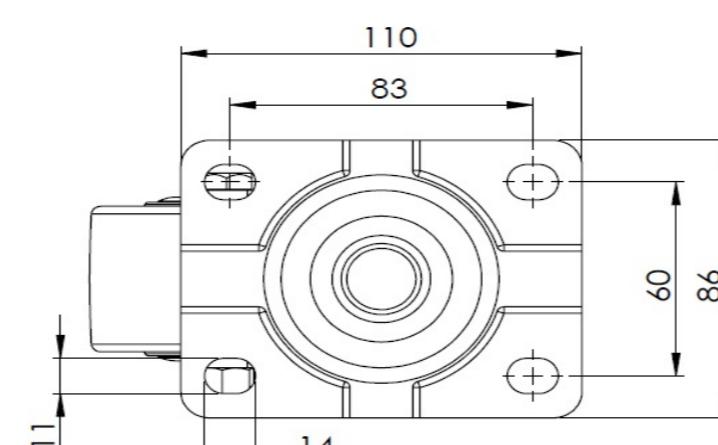

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2026 DershengInternational www.dersheng.com