

## 1116-SS-MI Medium Duty Institutional Stainless Steel Caster Series




W Resolute Wheel Diameter x Wheel Width 75 x 31mm

EAN

TW-4111603002082

Portable Casters, Threaded Stem Stamping Fork—5/8"-11 teeth Surface vibration resistant, Mounting Type - Top Plate device Reinforced impact-resistant polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread Gray, Bearing—Ball Bearings.

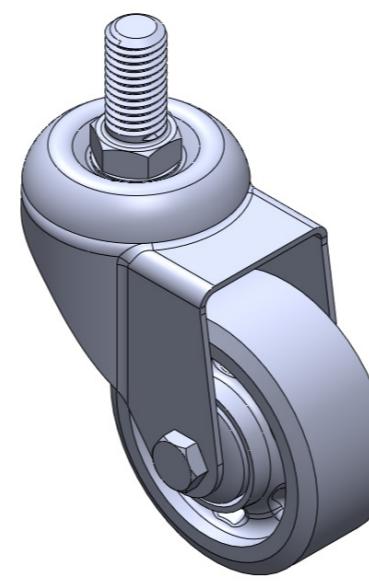

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product

Picture may differ from original product

## Technical Data

Imperial  Metric

Wheel Diameter 3 "

Wheel Width 1-1/4 "

Wheel Bearing Wheels With Ball Bearings

Threaded Stem 5/8 " -11 牙

Threaded Length 1-5/16 "

Offset 1-11/16 "

Swivel Interference 6-5/16 "

Overall Height 4-3/8 "

Swivel Radius 3-1/8 "

Hardness Of Tread 72±5° Shore A

Load Capacity (Dynamic) 243lbs

Load Capacity (Static) 364lbs

Temperature -4°F to +140°F

Fork Type Swivel Caster

Stainless Y

Electrical Conductivity N/A

Anti-Static N/A


Weight 1.1lbs

Standard ISO22883


## Advantages at a glance

Rolling Resistance	• • • •
Operating Noise	• • • •
Floor Surface Preservation	• • • •

## Dimensions

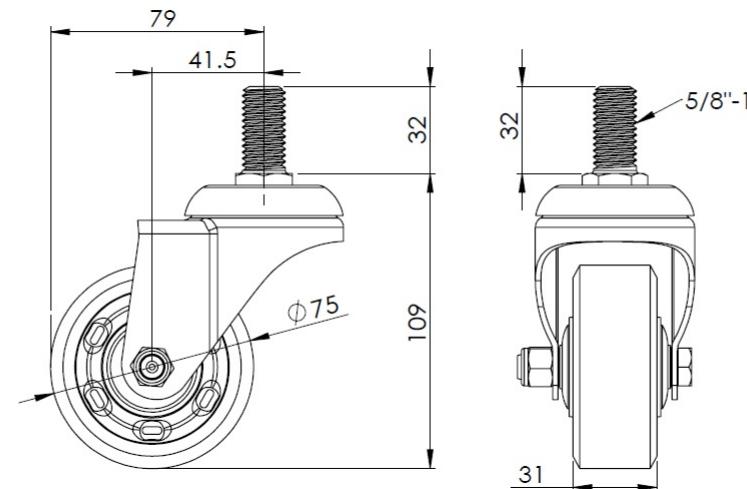

## Mounting

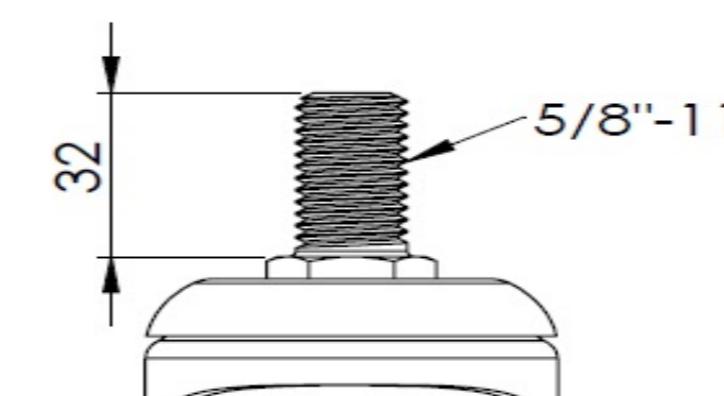

\* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2026 Dersheng International www.dersheng.com