

1116-SS-MI Medium Duty Institutional Stainless Steel Caster Series



Rubber Wheel Diameter × Wheel Width 75 × 31mm

EAN


TW-4111603004062

Equipped with double-brake With locking system Casters. Riveted and Stamping Fork —1/2"-12 teeth. Surface vibration, Mounting Type - Top Plate. High-Quality Resilient Rubber Wheel Tread and core. Black, Plain Bearings.

Wheel surface: High-quality elastic rubber

Wheel Center: High-quality elastic rubber

Drawings are for reference only and may differ from the product

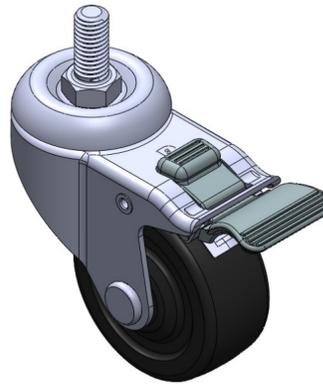

Picture may differ from original product

Technical Data


Metric Imperial

Wheel Diameter	75mm
Wheel Width	31mm
Wheel Bearing	Wheel With Plain Bearing
Threaded Stem	1/2" -12牙
Threaded Length	28mm
Offset	41.5mm
Swivel Interference	212mm
Overall Height	109mm
Swivel Radius	106mm
Hardness Of Tread	80±5° Shore A
Load Capacity (Dynamic)	70kgs
Load Capacity (Static)	105kgs
Temperature	-20°C to +120°C
Fork Type	Swivel Caster With Total Brake
Stainless	Y
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.65kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ● ○ ○
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ○

Dimensions

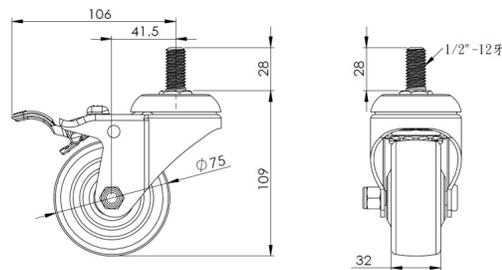

Mounting

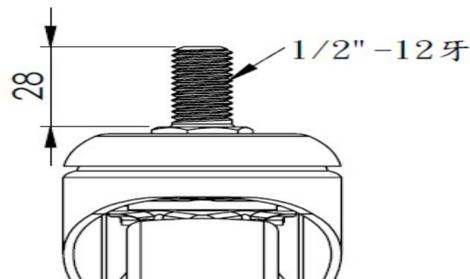

* For any deviation between metric and imperial spec, please refer to the metric spec.