

1116-SS-MI Medium Duty Institutional Stainless Steel Caster Series



Rubber Wheel Diameter × Wheel Width 75 × 31mm

EAN


TW-4111603004062

Equipped with double-brake With locking system Casters. Riveted and Stamping Fork —1/2"-12 teeth. Surface vibration, Mounting Type - Top Plate. High-Quality Resilient Rubber Wheel Tread and core. Black, Plain Bearings.

Wheel surface: High-quality elastic rubber

Wheel Center: High-quality elastic rubber

Drawings are for reference only and may differ from the product

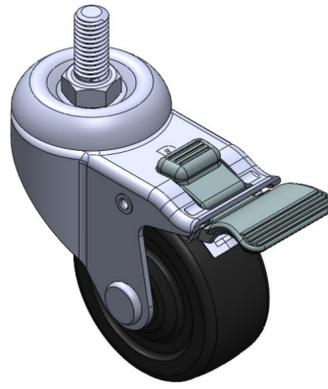

Picture may differ from original product

Technical Data

Imperial Metric

Wheel Diameter	3 "
Wheel Width	1-1/4 "
Wheel Bearing	Wheel With Plain Bearing
Threaded Stem	1/2 " -12牙
Threaded Length	1-1/8 "
Offset	1-11/16 "
Swivel Interference	8-1/2 "
Overall Height	4-3/8 "
Swivel Radius	4-1/4 "
Hardness Of Tread	80±5° Shore A
Load Capacity (Dynamic)	154lbs
Load Capacity (Static)	231lbs
Temperature	-4°F to +248°F
Fork Type	Swivel Caster With Total Brake
Stainless	Y
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	1.4lbs
Standard	ISO22883


Advantages at a glance

Rolling Resistance ●●●○○


Operating Noise ●●●●○

Floor Surface Preservation ●●●●○

Dimensions

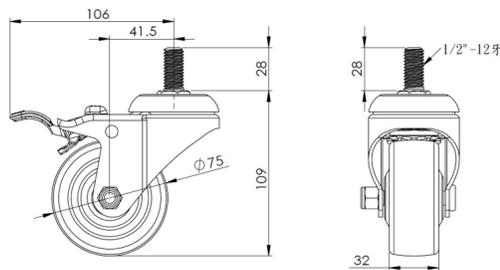

Mounting

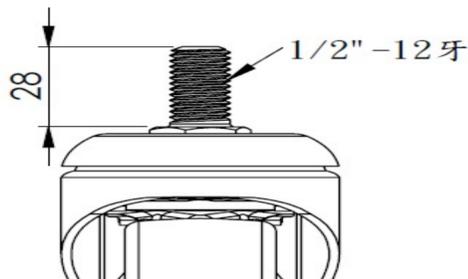

* For any deviation between metric and imperial spec, please refer to the metric spec.