

# 1116-SS-MI Medium Duty Institutional Stainless Steel Caster Series



AQPU (grey) Wheel Diameter × Wheel Width 75 x 31mm


EAN

TW-4111603004071

Equipped with double-brake locking Casters. Riveted and Stamping Top Plate legs with high-grade perforations. Surface vibration, Mounting Type - Top Plate. Aluminum wheel centers, High Quality Polyurethane Wheel Treads. Gray Bearing—Ball Bearings.

Wheel surface: High-quality polyurethane  
Wheel Center: Aluminum core

Drawings are for reference only and may differ from the product

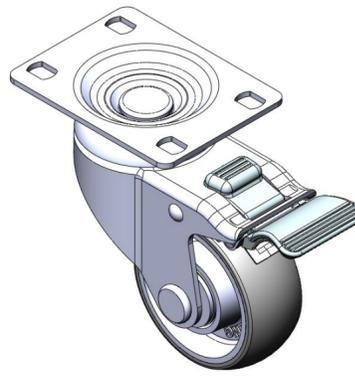

Picture may differ from original product

## Technical Data


Metric  Imperial

Wheel Diameter	75mm
Wheel Width	31mm
Wheel Bearing	Wheels With Ball Bearings
Plate Size	92 x 70mm
Bolt Hole Spacing	75 x 45mm
Plate Hole	12 x 9mm
Offset	41.5mm
Swivel Interference	212mm
Overall Height	113mm
Swivel Radius	106mm
Hardness Of Tread	77±5° Shore A
Load Capacity (Dynamic)	125kgs
Load Capacity (Static)	187.5kgs
Temperature	-20°C to +70°C
Fork Type	Swivel Caster With Total Brake
Stainless	Y
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.75kgs
Standard	ISO22883


## Advantages at a glance

Rolling Resistance	•••••
Operating Noise	•••••
Floor Surface Preservation	•••••

## Dimensions

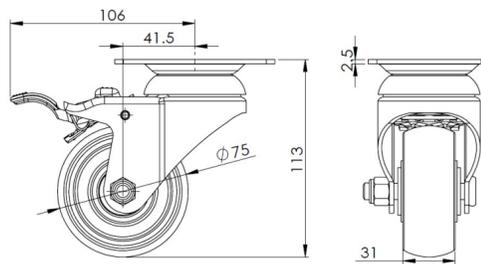

## Mounting

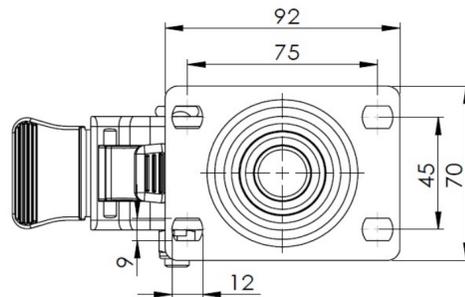

\* For any deviation between metric and imperial spec, please refer to the metric spec.