

## 1116-SS-MI Medium Duty Institutional Stainless Steel Caster Series



Nylon Wheel Diameter x Wheel Width 100 x 31mm


EAN

TW-4111604001007

Rigid Casters, Stamping Fabricated Caster Fork — high-grade perforation Surface vibration, Mounting Type - Top Plate device Reinforced Polypropylene and rim White, wheels — Plain Bearing.

Wheel surface: thermoplastic  
Wheel Center: thermoplastic

Drawings are for reference only and may differ from the product

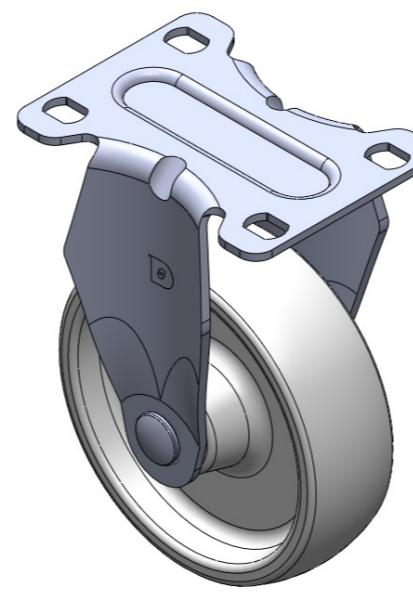

Picture may differ from original product

## Technical Data

Metric  Imperial

Wheel Diameter 100mm

Wheel Width 31mm

Wheel Bearing Wheel With Plain Bearing

Plate Size 92 x 70mm

Bolt Hole Spacing 75 x 45mm

Plate Hole 12 x 9mm

Overall Height 137mm

Hardness Of Tread 75±5° Shore D

Load Capacity (Dynamic) 120kgs

Load Capacity (Static) 180kgs

Temperature -20°C to +80°C

Fork Type Rigid Caster

Stainless Y

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.45kgs

Standard ISO22883


## Advantages at a glance

Rolling Resistance • • • •


Operating Noise • • ○ ○ ○

Floor Surface Preservation • • ○ ○ ○

## Dimensions

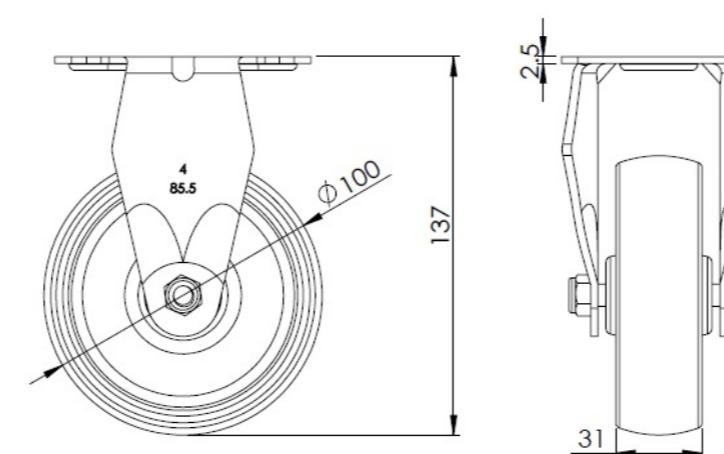

## Mounting

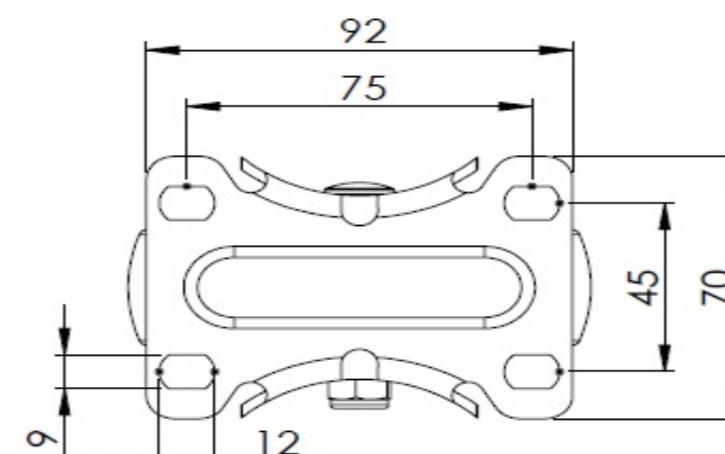

\* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com