


1116-SS-MJ Medium Duty Stainless Steel Caster Series

PU Wheel Diameter x Wheel Width 100 x 34mm

EAN

TW-4111604001009

Rigid Casters, Stamping Fabricated Caster Fork; surface vibration, Mounting Type - Top Plate device; thermoplastic Wheel Center and Wheel Tread; red, Bearing—Ball Bearings.

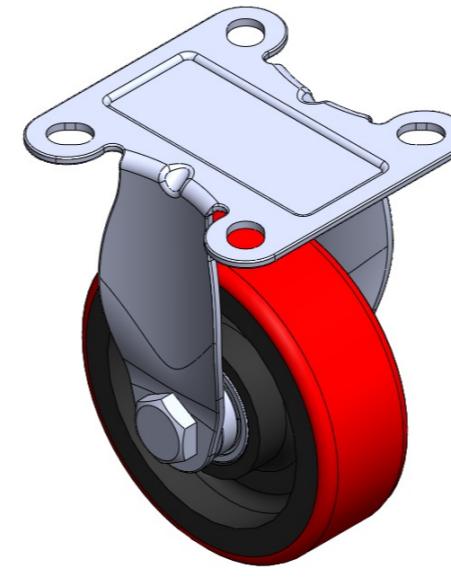

Wheel surface: High-quality polyurethane
Wheel Center: Iron core / Cast iron core

Drawings are for reference only and may differ from the product

Picture may differ from original product

Technical Data

 Metric Imperial

Wheel Diameter 100mm

Wheel Width 34mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 95 x 95mm

Bolt Hole Spacing 70 x 70mm

Plate Hole 13.5 x 10.5mm

Overall Height 137mm

Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic) 135kgs

Load Capacity (Static) 202.5kgs

Temperature -20°C to +70°C

Fork Type Rigid Caster

Stainless Y

Electrical Conductivity N/A

Anti-Static N/A

Weight 1.0kgs

Standard ISO22883


Advantages at a glance

Rolling Resistance • • • ○ ○


Operating Noise • • • • ○

Floor Surface Preservation • • • • ○

Dimensions

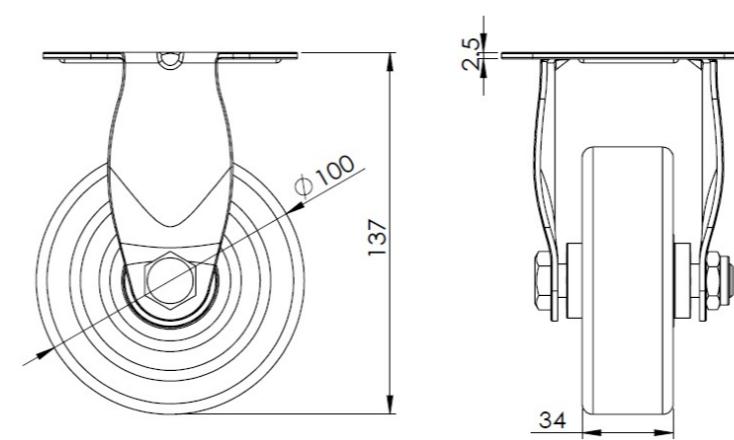

Mounting

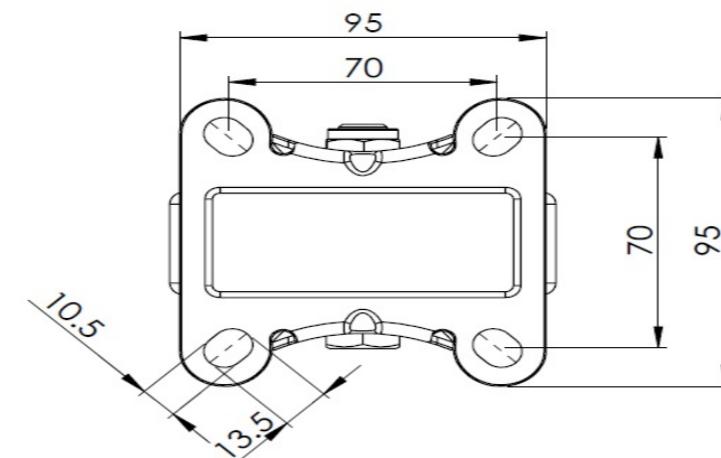

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com