

1116-SS-MI Medium Duty Institutional Stainless Steel Caster Series



Resolute Wheel Diameter × Wheel Width 100 x 31mm

EAN


TW-4111604001013

Rigid Casters, Stamping Fabricated Caster Fork — 72 x 53.5 mm (2-7/8" x 2-1/8") Bolt Hole Spacing Surface vibration, Mounting Type - Top Plate device High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread Gray, wheel — Plain Bearing.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product

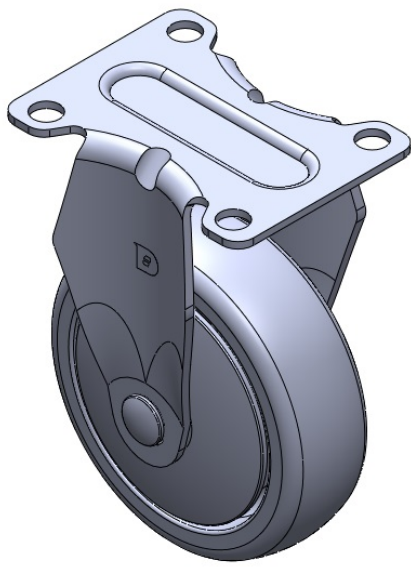

Picture may differ from original product


Technical Data

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| <input checked="" type="radio"/> Imperial <input type="radio"/> Metric |                          |
| Wheel Diameter                                                         | 4 "                      |
| Wheel Width                                                            | 1-1/4 "                  |
| Wheel Bearing                                                          | Wheel With Plain Bearing |
| Plate Size                                                             | 3-5/8 " x 2-13/16 "      |
| Bolt Hole Spacing                                                      | 2-7/8 " x 2-1/8 "        |
| Plate Hole                                                             | 3/8 "                    |
| Overall Height                                                         | 5-1/2 "                  |
| Hardness Of Tread                                                      | 72±5° Shore A            |
| Load Capacity (Dynamic)                                                | 276lbs                   |
| Load Capacity (Static)                                                 | 413lbs                   |
| Temperature                                                            | -4°F to +140°F           |
| Fork Type                                                              | Rigid Caster             |
| Stainless                                                              | Y                        |
| Electrical Conductivity                                                | N/A                      |
| Anti-Static                                                            | N/A                      |
| Weight                                                                 | 1.0lbs                   |
| Standard                                                               | ISO22883                 |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ● ● |
| Operating Noise            | ● ● ● ● ● |
| Floor Surface Preservation | ● ● ● ● ● |

Dimensions

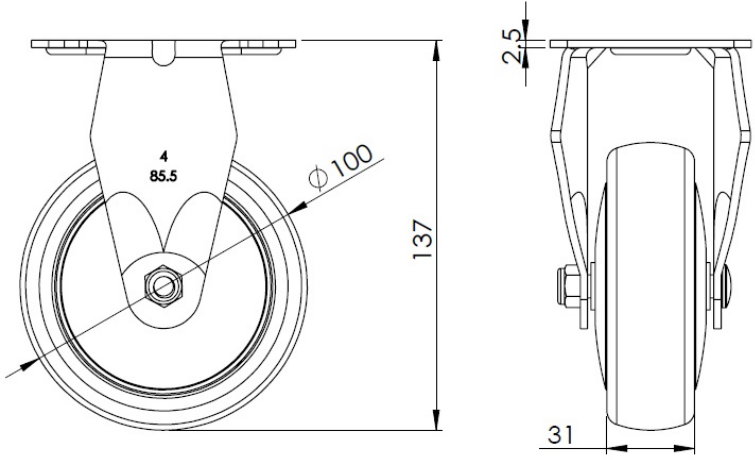

Mounting

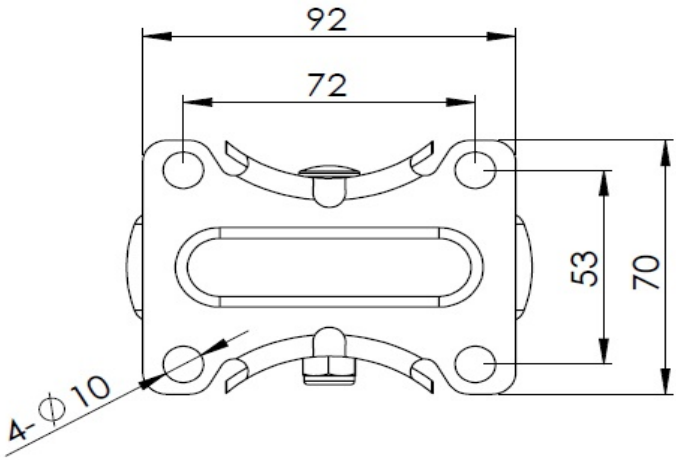

\* For any deviation between metric and imperial spec, please refer to the metric spec.