

## 1116-SS-MI Medium Duty Institutional Stainless Steel Caster Series




PPR Wheel Diameter x Wheel Width 100 x 31mm

EAN

TW-4111604001036

Rigid Casters, Stamping Fabricated Caster Fork — instrument aperture Surface vibration, Mounting Type - Top Plate device High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread Gray, Bearing — Ball Bearings.

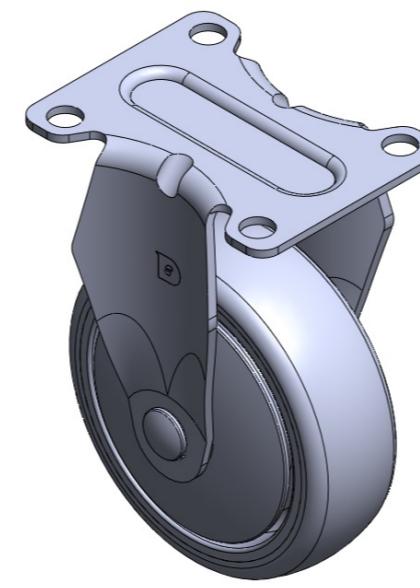

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product

Picture may differ from original product

## Technical Data

 Metric  Imperial

Wheel Diameter 100mm

Wheel Width 31mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 92 x 70mm

Bolt Hole Spacing 72 x 53mm

Plate Hole 10mm

Overall Height 137mm

Hardness Of Tread 82±5° Shore A

Load Capacity (Dynamic) 100kgs

Load Capacity (Static) 150kgs

Temperature -20°C to +60°C

Fork Type Rigid Caster

Stainless Y

Electrical Conductivity N/A

Anti-Static N/A


Weight 0.45kgs

Standard ISO22883


## Advantages at a glance

Rolling Resistance	● ● ● ● ○
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ●

## Dimensions

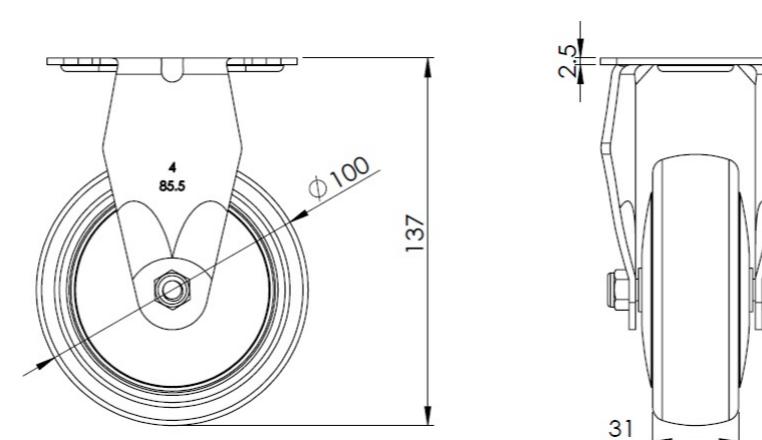

## Mounting

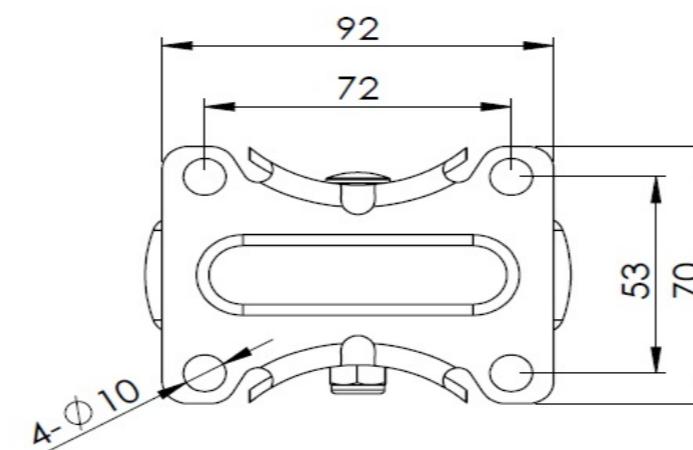

\* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com