

1116-SS-MJ Medium Duty Stainless Steel Caster Series

Nylon wheel (white) Wheel diameter x wheel width 100 x 32mm


EAN

TW-4111604001051

Rigid Casters, Stamping Fabricated Caster Fork; surface vibration, Mounting Type - Top Plate device; thermoplastic Wheel Center and Wheel Tread; white; Bearing—Ball Bearings.

Wheel surface: thermoplastic
Wheel Center: thermoplastic

Drawings are for reference only and may differ from the product

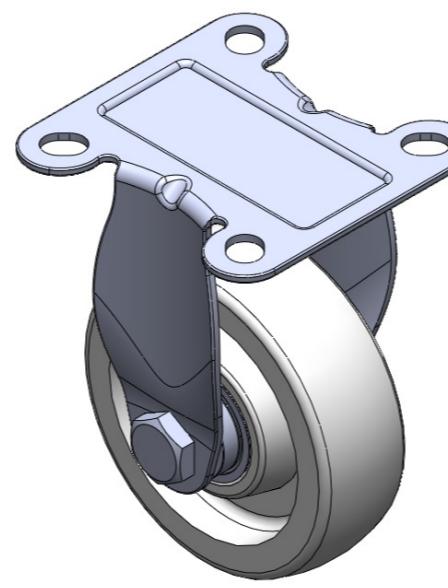

Picture may differ from original product

Technical Data

Metric Imperial

Wheel Diameter 100mm

Wheel Width 32mm

Wheel Bearing Wheel With Plain Bearing

Plate Size 95 x 95mm

Bolt Hole Spacing 70 x 70mm

Plate Hole 13.5 x 10.5mm

Overall Height 135mm

Hardness Of Tread 75±5° Shore D

Load Capacity (Dynamic) 120kgs

Load Capacity (Static) 180kgs

Temperature -20°C to +80°C

Fork Type Rigid Caster

Stainless Y

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.45kgs

Standard ISO22883


Advantages at a glance

Rolling Resistance • • • •


Operating Noise • • ○ ○ ○

Floor Surface Preservation • • ○ ○ ○

Dimensions

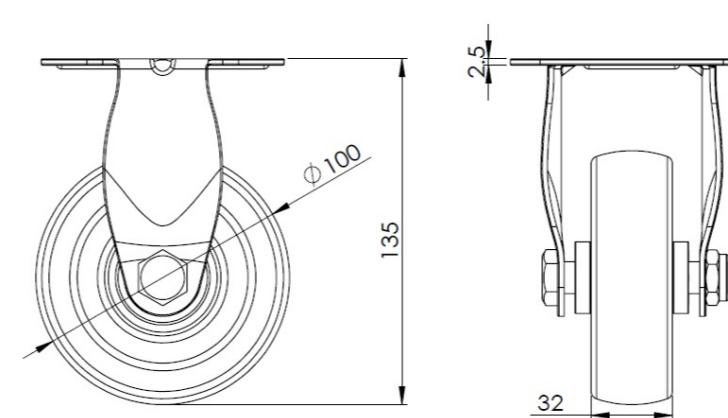

Mounting

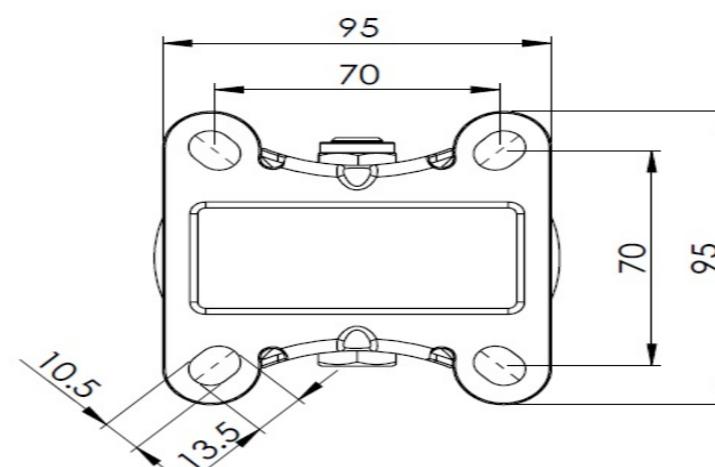

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com