

1116-SS-MJ Medium Duty Stainless Steel Caster Series

Nylon wheel (white) Wheel diameter × wheel width 100 x 31mm

EAN


TW-4111604002005

Swivel Casters, Riveted and Stamping Fork. Surface vibration, Mounting Type - Top Plate device. Reinforced Polypropylene and Wheel Tread. White, Plain Bearings.

Wheel surface: thermoplastic

Wheel Center: thermoplastic

Drawings are for reference only and may differ from the product

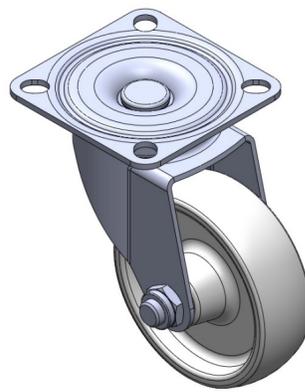

Picture may differ from original product

Technical Data


Imperial Metric

| | |
|-------------------------|--------------------------|
| Wheel Diameter | 4 " |
| Wheel Width | 1-1/4 " |
| Wheel Bearing | Wheel With Plain Bearing |
| Plate Size | 3-5/8 " x 3-5/8 " |
| Bolt Hole Spacing | 2-3/4 " x 2-3/4 " |
| Plate Hole | 9/16 " x 3/8 " |
| Offset | 1-11/16 " |
| Swivel Interference | 7-3/8 " |
| Overall Height | 5-3/8 " |
| Swivel Radius | 3-5/8 " |
| Hardness Of Tread | 75±5° Shore D |
| Load Capacity (Dynamic) | 265lbs |
| Load Capacity (Static) | 397lbs |
| Temperature | -4°F to +176°F |
| Fork Type | Swivel Caster |
| Stainless | Y |
| Electrical Conductivity | N/A |
| Anti-Static | N/A |
| Weight | 1.9lbs |
| Standard | ISO22883 |


Advantages at a glance

| | |
|----------------------------|-----------|
| Rolling Resistance | ● ● ● ● ● |
| Operating Noise | ● ● ○ ○ ○ |
| Floor Surface Preservation | ● ● ○ ○ ○ |

Dimensions

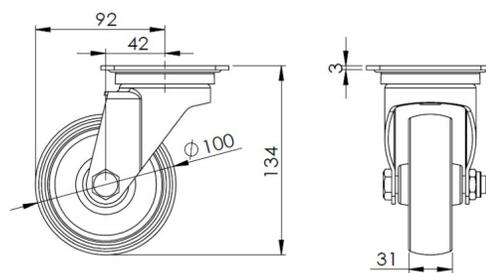

Mounting

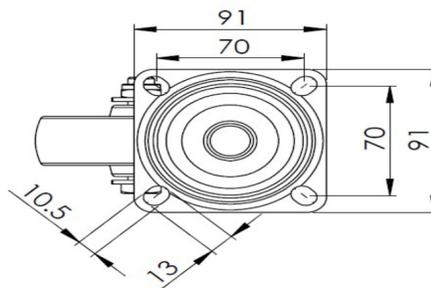

* For any deviation between metric and imperial spec, please refer to the metric spec.