

# 1116-SS-MJ Medium Duty Stainless Steel Caster Series



PU Wheel Diameter × Wheel Width 100 x 34mm

EAN  
TW-4111604002015

Swivel Casters, Riveted and Stamping Top Plate. Surface vibration, Mounting Type - Top Plate device. Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread. Red color, Bearing—Ball Bearings.

Wheel surface: High-quality polyurethane  
Wheel Center: Iron core / Cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

## Technical Data


Imperial  Metric

Wheel Diameter	4 "
Wheel Width	1-3/8 "
Wheel Bearing	Wheels With Ball Bearings
Plate Size	3-5/8 " x 3-5/8 "
Bolt Hole Spacing	2-3/4 " x 2-3/4 "
Plate Hole	9/16 " x 3/8 "
Offset	1-11/16 "
Swivel Interference	7-3/8 "
Overall Height	5-3/8 "
Swivel Radius	3-5/8 "
Hardness Of Tread	92±5° Shore A
Load Capacity (Dynamic)	298lbs
Load Capacity (Static)	445lbs
Temperature	-4°F to +158°F
Fork Type	Swivel Caster
Stainless	Y
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	3.1lbs
Standard	ISO22883


## Advantages at a glance

Rolling Resistance	● ● ● ○ ○
Operating Noise	● ● ● ○
Floor Surface Preservation	● ● ● ○

## Dimensions

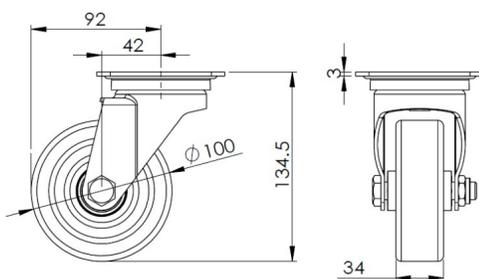

## Mounting

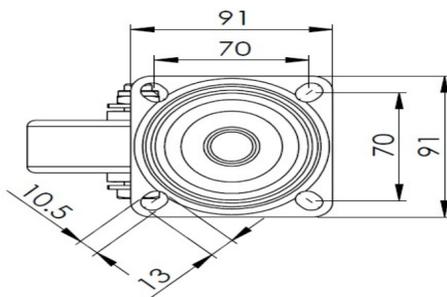

\* For any deviation between metric and imperial spec, please refer to the metric spec.