

1116-SS-MI Medium Duty Institutional Stainless Steel Caster Series



Resolute Wheel Diameter × Wheel Width 100 x 34mm

EAN


TW-4111604002027

Swivel Casters, Riveted and Stamping Top Plate—72 x 53.5 mm (2-7/8" x 2-1/8") Bolt Hole Spacing Surface vibration, Mounting Type - Top Plate device High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread Blue, Bearing—Ball Bearings.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product

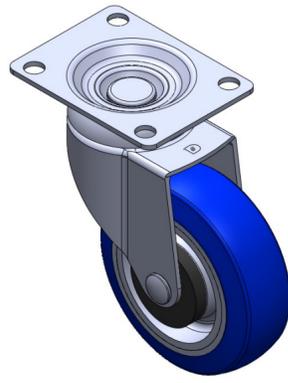

Picture may differ from original product

Technical Data


Metric Imperial

| | |
|-------------------------|---------------------------|
| Wheel Diameter | 100mm |
| Wheel Width | 34mm |
| Wheel Bearing | Wheels With Ball Bearings |
| Plate Size | 92 x 70mm |
| Bolt Hole Spacing | 72 x 53mm |
| Plate Hole | 10mm |
| Offset | 41mm |
| Swivel Interference | 182mm |
| Overall Height | 137mm |
| Swivel Radius | 91mm |
| Hardness Of Tread | 72±5° Shore A |
| Load Capacity (Dynamic) | 125kgs |
| Load Capacity (Static) | 187.5kgs |
| Temperature | -20°C to +60°C |
| Fork Type | Swivel Caster |
| Stainless | Y |
| Electrical Conductivity | N/A |
| Anti-Static | N/A |
| Weight | 0.75kgs |
| Standard | ISO22883 |


Advantages at a glance

| | |
|----------------------------|-------|
| Rolling Resistance | ••••• |
| Operating Noise | ••••• |
| Floor Surface Preservation | ••••• |

Dimensions

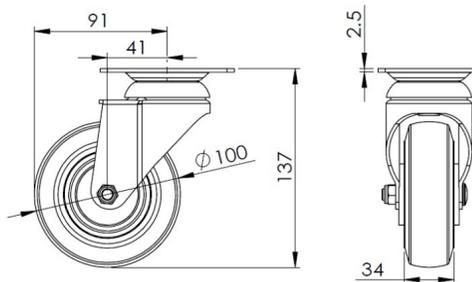

Mounting

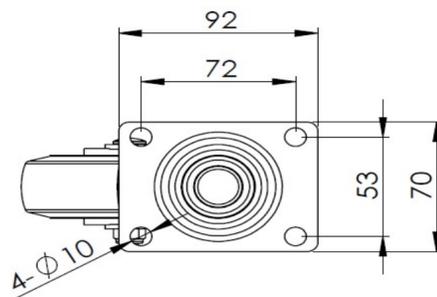

* For any deviation between metric and imperial spec, please refer to the metric spec.