

1116-SS-MI Medium Duty Institutional Stainless Steel Caster Series




PPR (S) Wheel Diameter × Wheel Width 100 x 31mm

EAN

TW-4111604002056

Swivel Casters, Riveted and Stamping Top Plate—72 x 53.5 mm (2-7/8" x 2-1/8") Bolt Hole Spacing Surface vibration, Mounting Type - Top Plate device High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread Gray, Bearing—Ball Bearings

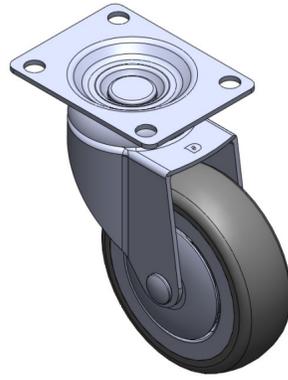

Picture may differ from original product

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product

Technical Data


Imperial Metric

| | |
|-------------------------|---------------------------|
| Wheel Diameter | 4 " |
| Wheel Width | 1-1/4 " |
| Wheel Bearing | Wheels With Ball Bearings |
| Plate Size | 3-5/8 " x 2-13/16 " |
| Bolt Hole Spacing | 2-7/8 " x 2-1/8 " |
| Plate Hole | 3/8 " |
| Offset | 1-5/8 " |
| Swivel Interference | 7-1/4 " |
| Overall Height | 5-1/2 " |
| Swivel Radius | 3-5/8 " |
| Hardness Of Tread | 82±5° Shore A |
| Load Capacity (Dynamic) | 220lbs |
| Load Capacity (Static) | 331lbs |
| Temperature | -4°F to +140°F |
| Fork Type | Swivel Caster |
| Stainless | Y |
| Electrical Conductivity | N/A |
| Anti-Static | N/A |
| Weight | 1.7lbs |
| Standard | ISO22883 |


Advantages at a glance

| | |
|----------------------------|-----------|
| Rolling Resistance | ● ● ● ● ○ |
| Operating Noise | ● ● ● ● ○ |
| Floor Surface Preservation | ● ● ● ● ● |

Dimensions

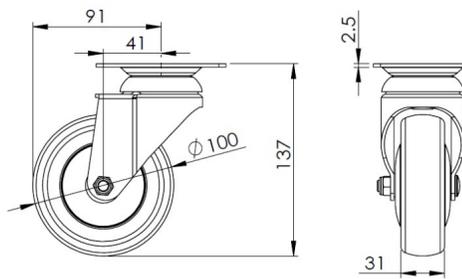

Mounting

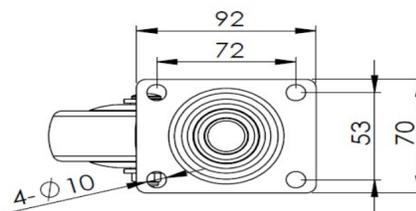

* For any deviation between metric and imperial spec, please refer to the metric spec.