

1116-SS-MJ Medium Duty Stainless Steel Caster Series

PU Wheel Diameter × Wheel Width 100 x 34mm

EAN

TW-4111604002057

Swivel Casters, Riveted and Stamping Top Plate. Surface vibration, Mounting Type - Top Plate device (Zinc-Plated iron bearings). Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread. Red, Bearing—Ball Bearings.

Wheel surface: High-quality polyurethane

Wheel Center: Iron core/Cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data


Imperial Metric

Wheel Diameter	4 "
Wheel Width	1-3/8 "
Wheel Bearing	Wheels With Ball Bearings
Plate Size	3-5/8 " x 3-5/8 "
Bolt Hole Spacing	2-3/4 " x 2-3/4 "
Plate Hole	9/16 " x 3/8 "
Offset	1-5/8 "
Swivel Interference	7-1/4 "
Overall Height	5-3/8 "
Swivel Radius	3-5/8 "
Hardness Of Tread	92±5° Shore A
Load Capacity (Dynamic)	309lbs
Load Capacity (Static)	463lbs
Temperature	-4°F to +158°F
Fork Type	Swivel Caster
Stainless	Y
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	3.1lbs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ○ ○
Operating Noise	● ● ● ○
Floor Surface Preservation	● ● ● ○

Dimensions

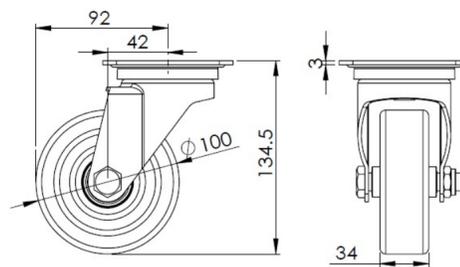

Mounting

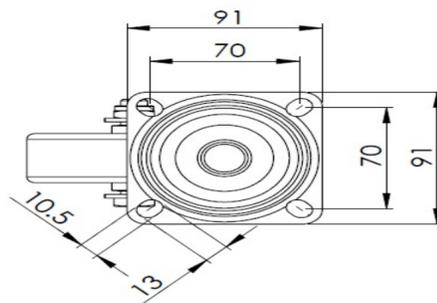

* For any deviation between metric and imperial spec, please refer to the metric spec.