

# 1116-SS-MI Medium Duty Institutional Stainless Steel Caster Series



AQPU (grey) wheel Diameter × Wheel Width 100 x 31mm


EAN

TW-4111604002061

Swivel Casters, Riveted and Stamping Top Plate with 72 x 53.5 mm (2-7/8" x 2-1/8") Bolt Hole Spacing. Surface vibration, Mounting Type - Top Plate device (with plastic cover). Aluminum wheel center, High Quality Polyurethane Wheel Tread. Gray, Bearing —Ball Bearings.

Wheel surface: High-quality polyurethane  
Wheel Center: Aluminum core

Drawings are for reference only and may differ from the product

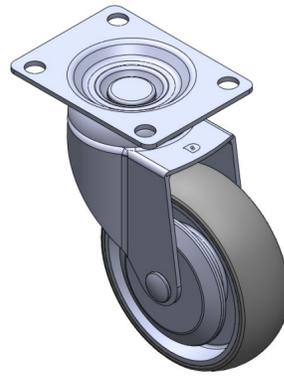

Picture may differ from original product

## Technical Data


Metric  Imperial

Wheel Diameter	100mm
Wheel Width	31mm
Wheel Bearing	Wheels With Ball Bearings
Plate Size	92 x 70mm
Bolt Hole Spacing	72 x 53mm
Plate Hole	10mm
Offset	41mm
Swivel Interference	182mm
Overall Height	137mm
Swivel Radius	91mm
Hardness Of Tread	77±5° Shore A
Load Capacity (Dynamic)	135kgs
Load Capacity (Static)	202.5kgs
Temperature	-20°C to +70°C
Fork Type	Swivel Caster
Stainless	Y
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.75kgs
Standard	ISO22883


## Advantages at a glance

Rolling Resistance	•••••
Operating Noise	•••••
Floor Surface Preservation	•••••

## Dimensions

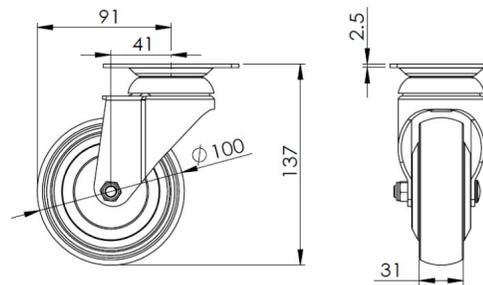

## Mounting

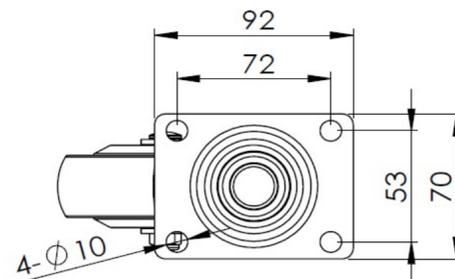

\* For any deviation between metric and imperial spec, please refer to the metric spec.