

# 1116-SS-MI Medium Duty Institutional Stainless Steel Caster Series



PP Wheel Diameter × Wheel Width 100 x 31mm

EAN


TW-4111604002075

Swivel Casters, Riveted and Stamping Top Plate Fork—72 x 53.5 mm (2-7/8" x 2-1/8") Bolt Hole Spacing; surface vibration, Mounting Type - Top Plate device; polypropylene Wheel Center and Wheel Tread; black, Bearing—middle tube type.

Wheel surface: PP polypropylene

Wheel Center: PP polypropylene

Drawings are for reference only and may differ from the product

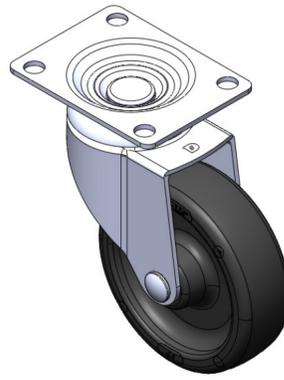

Picture may differ from original product

## Technical Data


Metric  Imperial

Wheel Diameter	100mm
Wheel Width	31mm
Wheel Bearing	Wheel With Plain Bearing
Plate Size	92 x 70mm
Bolt Hole Spacing	72 x 53mm
Plate Hole	10mm
Offset	41mm
Swivel Interference	182mm
Overall Height	137mm
Swivel Radius	91mm
Hardness Of Tread	65±5° Shore D
Load Capacity (Dynamic)	90kgs
Load Capacity (Static)	135kgs
Temperature	-10°C to +60°C
Fork Type	Swivel Caster
Stainless	Y
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.75kgs
Standard	ISO22883


## Advantages at a glance

Rolling Resistance	● ● ● ● ●
Operating Noise	● ● ● ○ ○
Floor Surface Preservation	● ● ● ○ ○

## Dimensions

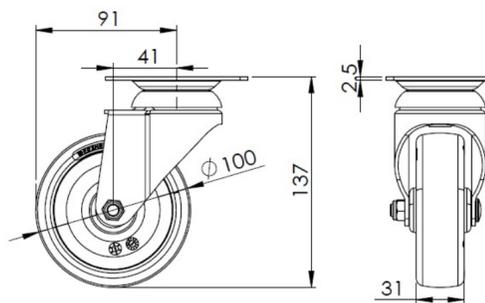

## Mounting

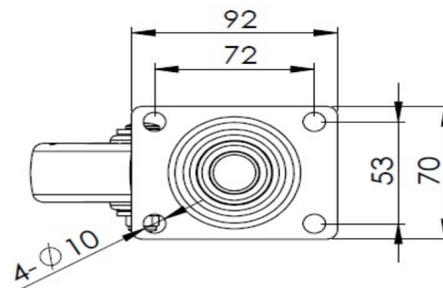

\* For any deviation between metric and imperial spec, please refer to the metric spec.