

# 1116-SS-MI Medium Duty Institutional Stainless Steel Caster Series



Rubber wheel (red) Wheel diameter × wheel width 100 x 31mm


EAN

TW-4111604002091

Swivel Casters, Riveted and Stamping Top Plate with 75 x 45 mm (3" x 1-3/4") Bolt Hole Spacing; surface vibration, Mounting Type - Top Plate device; aluminum Wheel Center, High-Quality high-temperature resistant rubber Wheel Tread; red Bearing—Ball Bearings.

Wheel surface: High-quality high-temperature resistant rubber  
 Wheel Center: Aluminum core

Drawings are for reference only and may differ from the product

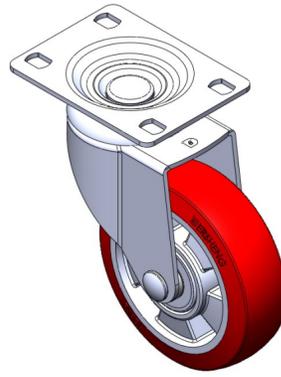

Picture may differ from original product

## Technical Data


Imperial  Metric

Wheel Diameter	4 "
Wheel Width	1-1/4 "
Wheel Bearing	Wheels With Ball Bearings
Plate Size	3-5/8 " x 2-13/16 "
Bolt Hole Spacing	3 " x 1-13/16 "
Plate Hole	1/2 " x 23/64 "
Offset	1-5/8 "
Swivel Interference	7-1/4 "
Overall Height	5-1/2 "
Swivel Radius	3-5/8 "
Hardness Of Tread	85±5° Shore A
Load Capacity (Dynamic)	298lbs
Load Capacity (Static)	446lbs
Temperature	-13°F to +302°F
Fork Type	Swivel Caster
Stainless	Y
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	1.7lbs
Standard	ISO22883


## Advantages at a glance

Rolling Resistance	● ● ● ○ ○
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ○

## Dimensions

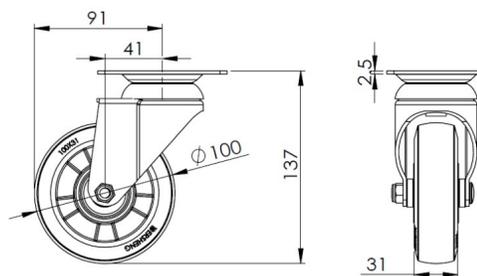

## Mounting

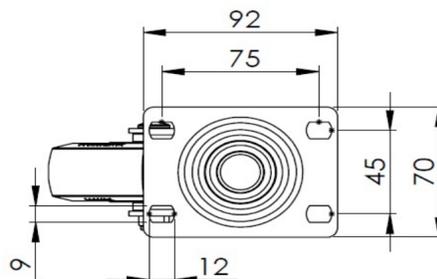

\* For any deviation between metric and imperial spec, please refer to the metric spec.