

1116-SS-MI Medium Duty Institutional Stainless Steel Caster Series




Rubber wheel (red) Wheel diameter × wheel width 100 x 31mm

EAN
TW-4111604002092

Portable Casters, Threaded Stem Stamping Fork with Riveted cores—1/2"-12 teeth; surface vibration, Mounting Type - Threaded Stem device; aluminum Wheel Center, High-Quality high-temperature resistant rubber Wheel Tread; red, Bearing—Ball Bearings.

Wheel surface: High-quality high-temperature resistant rubber
Wheel Center: Aluminum core

Drawings are for reference only and may differ from the product

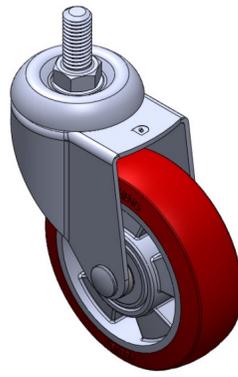

Picture may differ from original product

Technical Data


Imperial Metric

Wheel Diameter	4 "
Wheel Width	1-1/4 "
Wheel Bearing	Wheels With Ball Bearings
Threaded Stem	1/2 " -12牙
Threaded Length	1-1/8 "
Offset	1-5/8 "
Swivel Interference	7-1/4 "
Overall Height	5-5/16 "
Swivel Radius	3-5/8 "
Hardness Of Tread	85±5° Shore A
Load Capacity (Dynamic)	298lbs
Load Capacity (Static)	446lbs
Temperature	-13°F to +302°F
Fork Type	Swivel Caster
Stainless	Y
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	1.4lbs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ○ ○
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ○

Dimensions

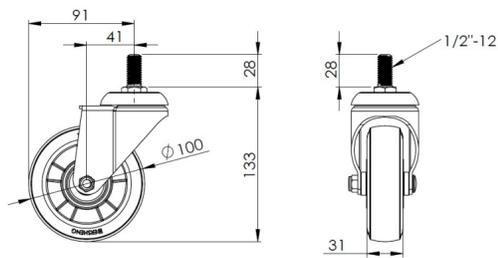

Mounting

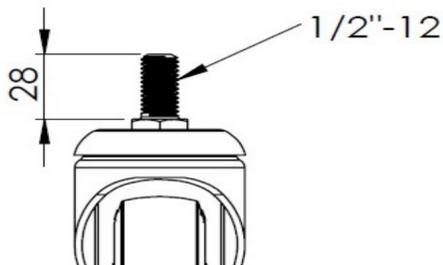

* For any deviation between metric and imperial spec, please refer to the metric spec.