

Product Information Sheet

1116-SS-MI Medium Duty Institutional Stainless Steel Caster Series



AQPU (brown) Wheel Diameter × Wheel Width 100 x 31mm

EAN


TW-4111604002093

Portable Casters, Threaded Stem Stamping Fork with Riveted cores—1/2"-12 teeth; surface vibration, Mounting Type - Threaded Stem device; aluminum Wheel Center, High Quality Polyurethane Wheel Tread; brown color; Bearing—Ball Bearings.

Wheel Surface: High-quality polyurethane wheel surface

Wheel Center: Aluminum core

Drawings are for reference only and may differ from the product

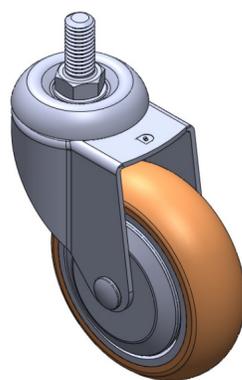

Picture may differ from original product

Technical Data


Imperial Metric

| | |
|-------------------------|---------------------------|
| Wheel Diameter | 4 " |
| Wheel Width | 1-1/4 " |
| Wheel Bearing | Wheels With Ball Bearings |
| Threaded Stem | 1/2 " -12牙 |
| Threaded Length | 1-1/8 " |
| Offset | 1-5/8 " |
| Swivel Interference | 7-1/4 " |
| Overall Height | 5-5/16 " |
| Swivel Radius | 3-5/8 " |
| Hardness Of Tread | 92±5° Shore A |
| Load Capacity (Dynamic) | 298lbs |
| Load Capacity (Static) | 446lbs |
| Temperature | -4°F to +158°F |
| Fork Type | Swivel Caster |
| Stainless | Y |
| Electrical Conductivity | N/A |
| Anti-Static | N/A |
| Weight | 1.4lbs |
| Standard | ISO22883 |


Advantages at a glance

| | |
|----------------------------|-------|
| Rolling Resistance | ••••• |
| Operating Noise | ••••• |
| Floor Surface Preservation | ••••• |

Dimensions

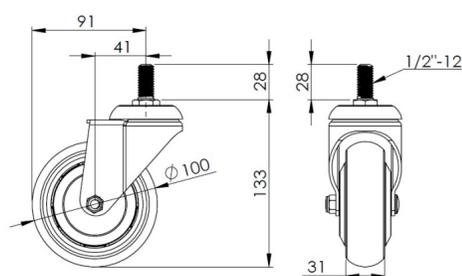

Mounting

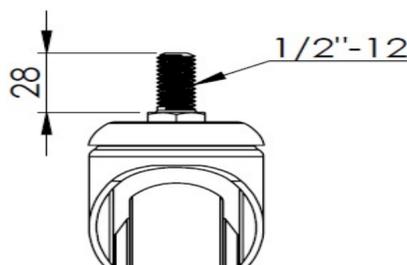

* For any deviation between metric and imperial spec, please refer to the metric spec.