

1116-SS-MI Medium Duty Institutional Stainless Steel Caster Series



Rubber wheel (red) Wheel diameter × wheel width 100 x 31mm


EAN

TW-4111604002099

Swivel Casters, Riveted and Stamping Top Plate bracket—72 x 53.5 mm (2-7/8" x 2-1/8") Bolt Hole Spacing Surface vibration, Mounting Type - Top Plate device Aluminum wheel center, High-Quality high-temperature resistant rubber Wheel Tread Red, Bearing —Ball Bearings.

Wheel surface: High-quality high-temperature resistant rubber
Wheel Center: Aluminum core

Drawings are for reference only and may differ from the product

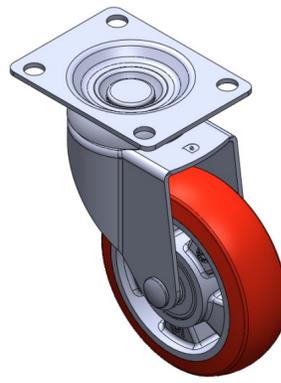

Picture may differ from original product

Technical Data


Metric Imperial

Wheel Diameter	100mm
Wheel Width	31mm
Wheel Bearing	Wheels With Ball Bearings
Plate Size	92 x 70mm
Bolt Hole Spacing	72 x 53mm
Plate Hole	10mm
Offset	41mm
Swivel Interference	182mm
Overall Height	137mm
Swivel Radius	91mm
Hardness Of Tread	85±5° Shore A
Load Capacity (Dynamic)	135kgs
Load Capacity (Static)	202.5kgs
Temperature	-25°C to +150°C
Fork Type	Swivel Caster
Stainless	Y
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.75kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ○ ○
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ○

Dimensions

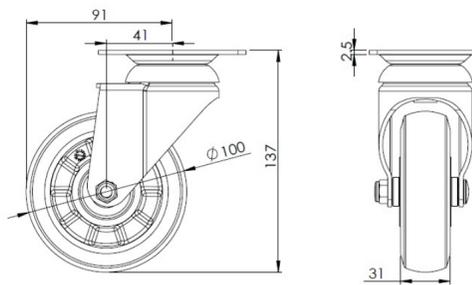

Mounting

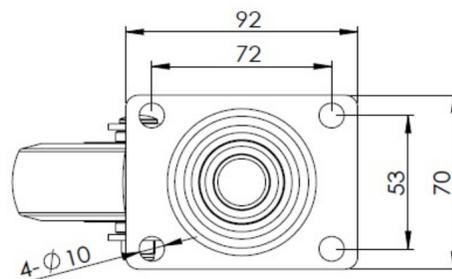

* For any deviation between metric and imperial spec, please refer to the metric spec.