

## 1116-SS-MI Medium Duty Institutional Stainless Steel Caster Series




Nylon Wheel Diameter x Wheel Width 125 x 38mm

EAN

TW-4111605001032

Rigid Casters, Stamping Fabricated Caster Fork — high-grade perforation Surface vibration, Mounting Type - Top Plate device Reinforced Polypropylene and Wheel Tread White, wheels — Plain Bearing.

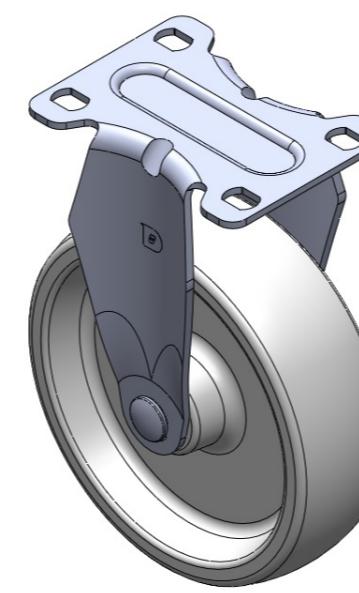

Wheel surface: thermoplastic  
Wheel Center: thermoplastic

Drawings are for reference only and may differ from the product

Picture may differ from original product

## Technical Data

Metric  Imperial

Wheel Diameter 125mm

Wheel Width 38mm

Wheel Bearing Wheel With Plain Bearing

Plate Size 92 x 70mm

Bolt Hole Spacing 75 x 45mm

Plate Hole 12 x 9mm

Overall Height 163mm

Hardness Of Tread 75±5° Shore D

Load Capacity (Dynamic) 140kgs

Load Capacity (Static) 210kgs

Temperature -20°C to +80°C

Fork Type Rigid Caster

Stainless Y

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.55kgs

Standard ISO22883


## Advantages at a glance

Rolling Resistance • • • •


Operating Noise • • ○ ○ ○

Floor Surface Preservation • • ○ ○ ○

## Dimensions

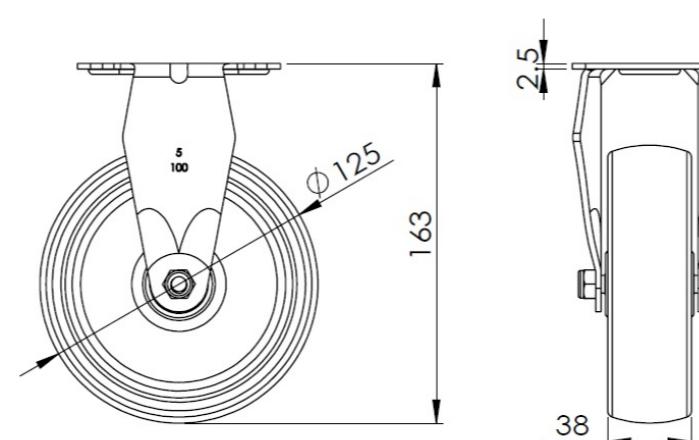

## Mounting

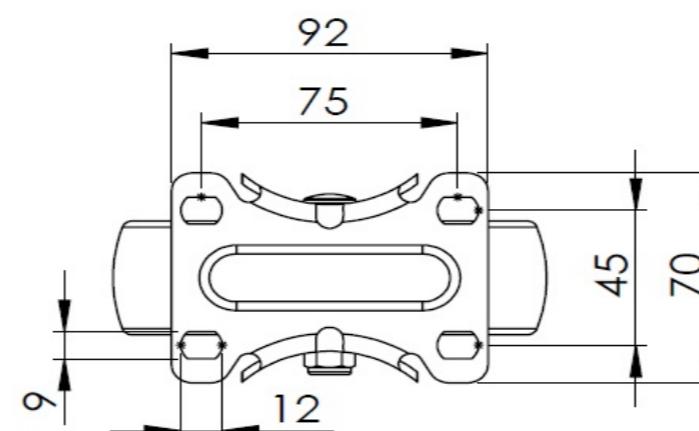

\* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com