

1116-SS-MI Medium Duty Institutional Stainless Steel Caster Series



Nylon wheel (white) Wheel diameter × wheel width 125 x 38mm

EAN


TW-4111605002004

Swivel Casters, Riveted and Stamping Fork. Surface vibration, Mounting Type - Top Plate device. Reinforced Polypropylene and Wheel Tread. White, Plain Bearings.

Wheel surface: thermoplastic

Wheel Center: thermoplastic

Drawings are for reference only and may differ from the product

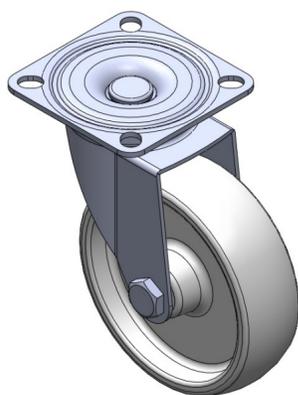

Picture may differ from original product

Technical Data


Metric Imperial

Wheel Diameter	125mm
Wheel Width	38mm
Wheel Bearing	Wheel With Plain Bearing
Plate Size	91 x 91mm
Bolt Hole Spacing	70 x 70mm
Plate Hole	13 x 10.5mm
Offset	41mm
Swivel Interference	206mm
Overall Height	158mm
Swivel Radius	103mm
Hardness Of Tread	75±5° Shore D
Load Capacity (Dynamic)	160kgs
Load Capacity (Static)	240kgs
Temperature	-20°C to +80°C
Fork Type	Swivel Caster
Stainless	Y
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.95kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ● ●
Operating Noise	● ● ○ ○ ○
Floor Surface Preservation	● ● ○ ○ ○

Dimensions

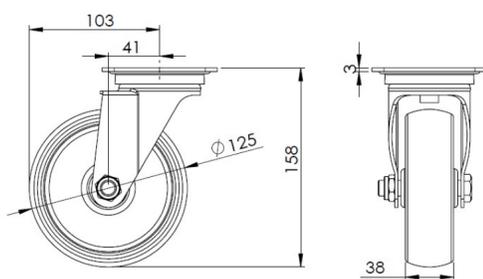

Mounting

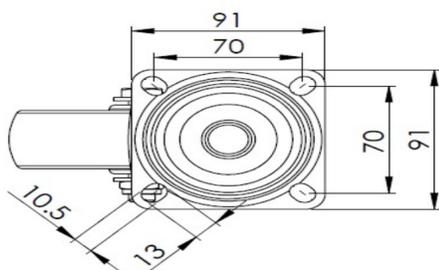

* For any deviation between metric and imperial spec, please refer to the metric spec.