

1116-SS-MI Medium Duty Institutional Stainless Steel Caster Series




Nylon Wheel Diameter × Wheel Width 125 x 38mm

EAN
TW-4111605002042

Swivel Casters, Threaded Stem Stamping Fork—1/2"-12 UNC; surface vibration protection, Mounting Type - Threaded Stem; thermoplastic Wheel Center and rim; white; Plain Bearings.

Wheel surface: thermoplastic
Wheel Center: thermoplastic

Drawings are for reference only and may differ from the product

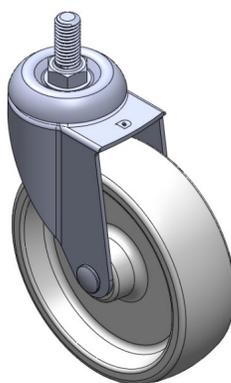

Picture may differ from original product

Technical Data


Metric Imperial

Wheel Diameter	125mm
Wheel Width	38mm
Wheel Bearing	Wheel With Plain Bearing
Threaded Stem	1/2" -12
Threaded Length	28mm
Offset	39mm
Swivel Interference	203mm
Overall Height	161mm
Swivel Radius	101.5mm
Hardness Of Tread	75±5° Shore D
Load Capacity (Dynamic)	140kgs
Load Capacity (Static)	210kgs
Temperature	-20°C to +80°C
Fork Type	Swivel Caster
Stainless	Y
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.75kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ● ●
Operating Noise	● ● ● ● ●
Floor Surface Preservation	● ● ● ● ●

Dimensions

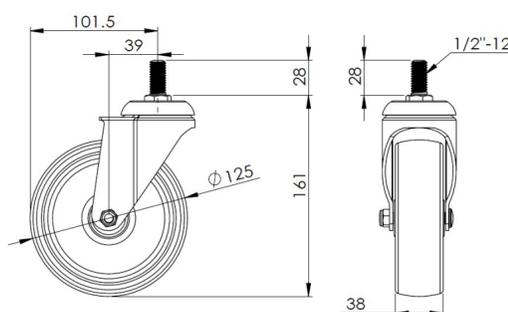

Mounting

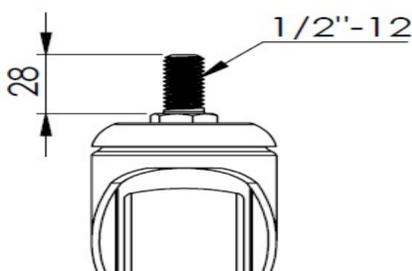

* For any deviation between metric and imperial spec, please refer to the metric spec.