

## Product Information Sheet

# 1116-SS-MI Medium Duty Institutional Stainless Steel Caster Series



Resolute Wheel Diameter × Wheel Width 125 x 31mm

EAN


TW-4111605002044

Portable Casters, Threaded Stem Stamping Fork with Riveted cores—1/2"-12 teeth  
Surface vibration resistant, Mounting Type - Threaded Stem system High-Quality  
Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene  
Rubber (TPR) Wheel Tread Gray, Bearing—Ball Bearings

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product

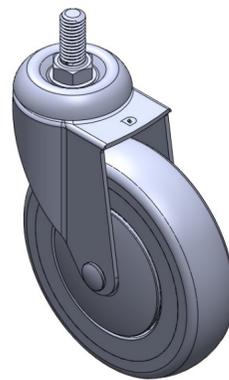

Picture may differ from original product

### Technical Data


Imperial  Metric

Wheel Diameter	5 "
Wheel Width	1-1/4 "
Wheel Bearing	Wheels With Ball Bearings
Threaded Stem	1/2 " -12
Threaded Length	1-1/8 "
Offset	1-9/16 "
Swivel Interference	8 "
Overall Height	6-7/16 "
Swivel Radius	4 "
Hardness Of Tread	72±5° Shore A
Load Capacity (Dynamic)	320lbs
Load Capacity (Static)	480lbs
Temperature	-4°F to +140°F
Fork Type	Swivel Caster
Stainless	Y
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	1.7lbs
Standard	ISO22883


### Advantages at a glance

Rolling Resistance	● ● ● ● ●
Operating Noise	● ● ● ● ●
Floor Surface Preservation	● ● ● ● ●

### Dimensions

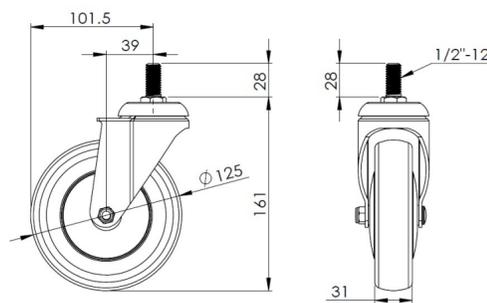

### Mounting

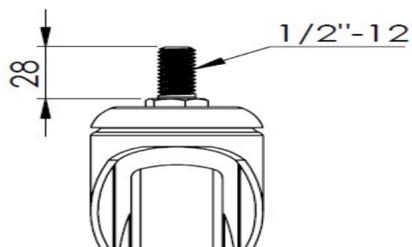

\* For any deviation between metric and imperial spec, please refer to the metric spec.