

1116-SS-MI Medium Duty Institutional Stainless Steel Caster Series




Resolute Wheel Diameter × Wheel Width 125 x 31mm

EAN

TW-4111605002045

Portable Casters, Threaded Stem Stamping Fork—5/8"-11 teeth Surface vibration resistant, Mounting Type - Threaded Stem system High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread Gray, Bearing—Ball Bearings

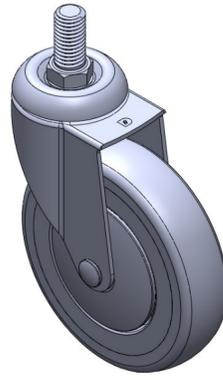

Picture may differ from original product

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product

Technical Data


Metric Imperial

Wheel Diameter	125mm
Wheel Width	31mm
Wheel Bearing	Wheels With Ball Bearings
Threaded Stem	5/8" -11
Threaded Length	32mm
Offset	39mm
Swivel Interference	203mm
Overall Height	161mm
Swivel Radius	101.5mm
Hardness Of Tread	72±5° Shore A
Load Capacity (Dynamic)	145kgs
Load Capacity (Static)	217.5kgs
Temperature	-20°C to +60°C
Fork Type	Swivel Caster
Stainless	Y
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.75kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ● ●
Operating Noise	● ● ● ● ●
Floor Surface Preservation	● ● ● ● ●

Dimensions

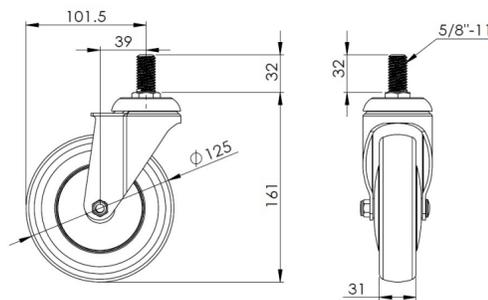

Mounting

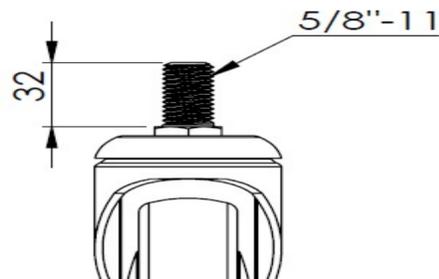

* For any deviation between metric and imperial spec, please refer to the metric spec.