

1116-SS-MI Medium Duty Institutional Stainless Steel Caster Series




PPR Wheel Diameter × Wheel Width 125 x 31mm

EAN

TW-4111605002051

Portable Casters, Threaded Stem Stamping Fork with Riveted cores—5/8"-11 teeth
Surface vibration protection, Mounting Type - Threaded Stem system Reinforced
Polypropylene Wheel Center and rim Gray Bearing—Ball Bearings

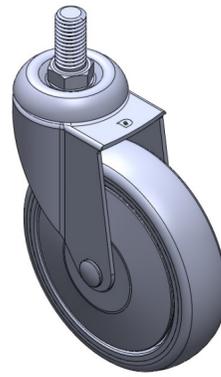

Picture may differ from original product

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product

Technical Data


Metric Imperial

Wheel Diameter	125mm
Wheel Width	31mm
Wheel Bearing	Wheels With Ball Bearings
Threaded Stem	5/8" -11
Threaded Length	32mm
Offset	39mm
Swivel Interference	203mm
Overall Height	161mm
Swivel Radius	101.5mm
Hardness Of Tread	82±5° Shore A
Load Capacity (Dynamic)	110kgs
Load Capacity (Static)	165kgs
Temperature	-20°C to +60°C
Fork Type	Swivel Caster
Stainless	Y
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.75kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ● ○
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ●

Dimensions

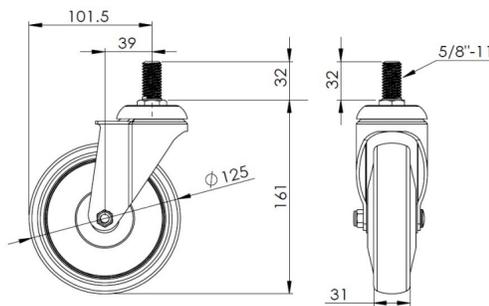

Mounting

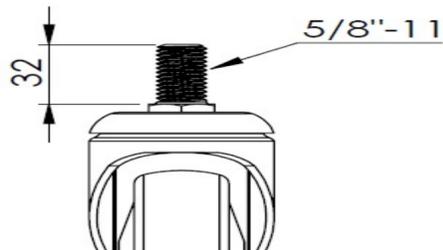

* For any deviation between metric and imperial spec, please refer to the metric spec.