

1116-SS-MI Medium Duty Institutional Stainless Steel Caster Series




W Nylon wheel (white) Wheel diameter × wheel width 125 x 31mm

EAN
TW-4111605002052

Swivel Casters, slit-type Riveted Stamping Fork—Ø21.5x56L with retaining rings
Surface vibration, slit-type Mounting Type device (no logo) Reinforced thermoplastic
Wheel Center and Wheel Tread White, Bearing—Ball Bearings

Wheel surface: thermoplastic
Wheel Center: thermoplastic

Drawings are for reference only and may differ from the product

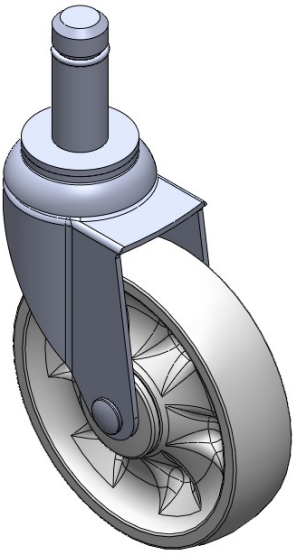

Picture may differ from original product


Technical Data

☒ Metric ☐ Imperial	
Wheel Diameter	125mm
Wheel Width	31mm
Wheel Bearing	Wheels With Ball Bearings
Stem Diameter	21.5mm
Stem Length	56mm
Offset	39mm
Swivel Interference	203mm
Overall Height	162mm
Swivel Radius	101.5mm
Hardness Of Tread	75±5° Shore D
Load Capacity (Dynamic)	150kgs
Load Capacity (Static)	225kgs
Temperature	-20°C to +80°C
Fork Type	Swivel Caster
Stainless	Y
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.85kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ● ●
Operating Noise	● ● ○ ○ ○
Floor Surface Preservation	● ● ○ ○ ○

Dimensions

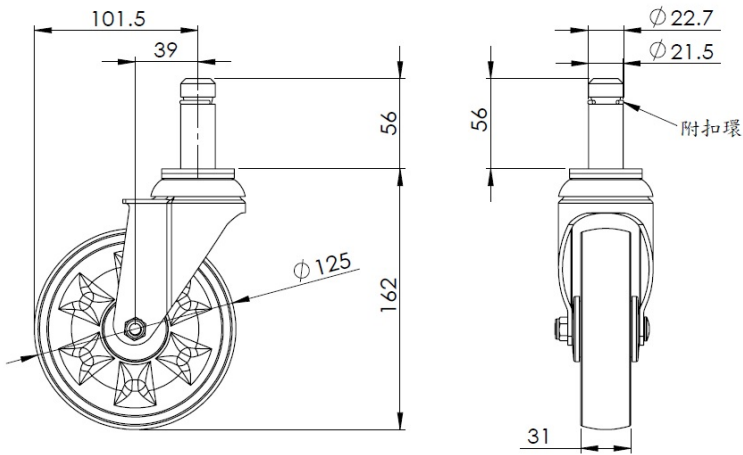

Mounting

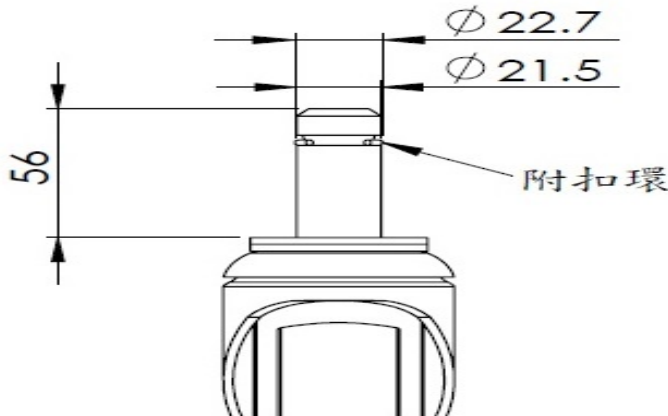

* For any deviation between metric and imperial spec, please refer to the metric spec.