

# 1116-SS-MI Medium Duty Institutional Stainless Steel Caster Series



W Resolute (Grey) Wheel Diameter x Wheel Width: 125 x 38mm

EAN


TW-4111605002056

Portable Casters, Riveted and Stamping Top Plate; surface vibration, Mounting Type - Top Plate device; reinforced impact-resistant polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread; gray, Bearing—Ball Bearings.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product

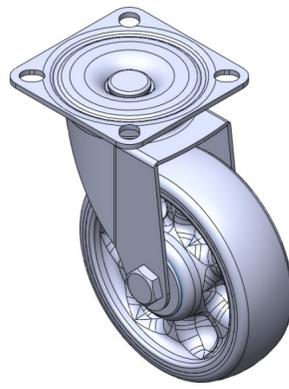

Picture may differ from original product

## Technical Data


Metric  Imperial

Wheel Diameter	125mm
Wheel Width	38mm
Wheel Bearing	Wheels With Ball Bearings
Plate Size	91 x 91mm
Bolt Hole Spacing	70 x 70mm
Plate Hole	13 x 10.5mm
Offset	41mm
Swivel Interference	206mm
Overall Height	158mm
Swivel Radius	103mm
Hardness Of Tread	72±5° Shore A
Load Capacity (Dynamic)	150kgs
Load Capacity (Static)	225kgs
Temperature	-20°C to +60°C
Fork Type	Swivel Caster
Stainless	Y
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.95kgs
Standard	ISO22883


## Advantages at a glance

Rolling Resistance	•••••
Operating Noise	•••••
Floor Surface Preservation	•••••

## Dimensions

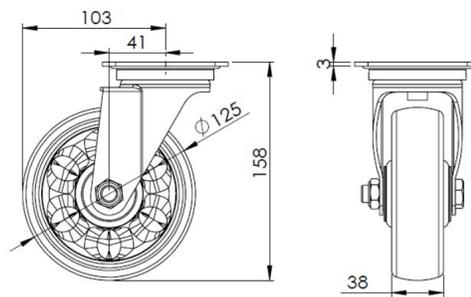

## Mounting

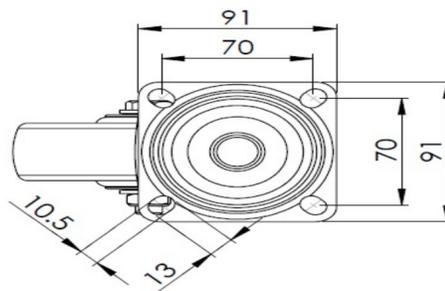

\* For any deviation between metric and imperial spec, please refer to the metric spec.