

# 1116-SS-MI Medium Duty Institutional Stainless Steel Caster Series



W Resolute (Grey) Wheel Diameter x Wheel Width: 125 x 38mm

EAN


TW-4111605002056

Portable Casters, Riveted and Stamping Top Plate; surface vibration, Mounting Type - Top Plate device; reinforced impact-resistant polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread; gray, Bearing—Ball Bearings.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product

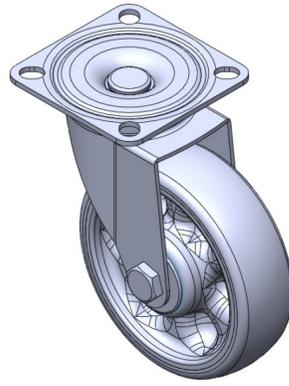

Picture may differ from original product

## Technical Data


Imperial  Metric

Wheel Diameter	5 "
Wheel Width	1-1/2 "
Wheel Bearing	Wheels With Ball Bearings
Plate Size	3-5/8 " x 3-5/8 "
Bolt Hole Spacing	2-3/4 " x 2-3/4 "
Plate Hole	9/16 " x 3/8 "
Offset	1-5/8 "
Swivel Interference	8-3/16 "
Overall Height	6-5/16 "
Swivel Radius	4-1/16 "
Hardness Of Tread	72±5° Shore A
Load Capacity (Dynamic)	331lbs
Load Capacity (Static)	496lbs
Temperature	-4°F to +140°F
Fork Type	Swivel Caster
Stainless	Y
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	2.1lbs
Standard	ISO22883


## Advantages at a glance

Rolling Resistance	•••••
Operating Noise	•••••
Floor Surface Preservation	•••••

## Dimensions

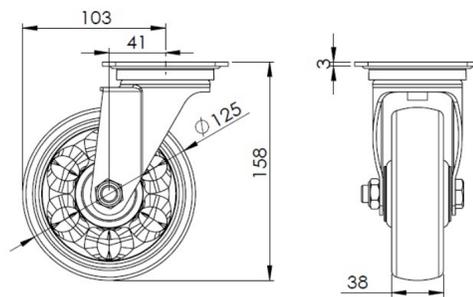

## Mounting

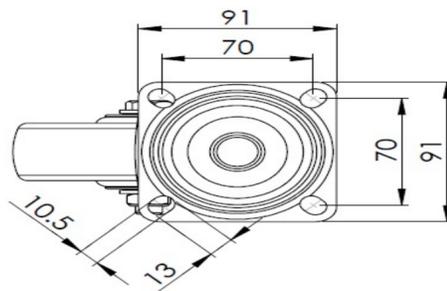

\* For any deviation between metric and imperial spec, please refer to the metric spec.