

1116-SS-MI Medium Duty Institutional Stainless Steel Caster Series



Rubber wheel (black) Wheel diameter × wheel width 125 x 32mm

EAN

TW-4111605002058

Swivel Casters, Riveted and Stamping Top Plate brackets—high-grade perforated surface; vibratory surface, Mounting Type - Top Plate device; High-Quality Resilient Rubber Wheel Center, Wheel Tread; black, wheels—Plain Bearing.



Picture may differ from original product

Wheel surface: High-quality elastic rubber wheels

Wheel Center: High-quality elastic rubber wheel

Drawings are for reference only and may differ from the product

Technical Data


Metric Imperial

Wheel Diameter	125mm
Wheel Width	32mm
Wheel Bearing	Wheel With Plain Bearing
Plate Size	92 x 70mm
Bolt Hole Spacing	75 x 45mm
Plate Hole	12 x 9mm
Offset	39mm
Swivel Interference	203mm
Overall Height	163.5mm
Swivel Radius	101.5mm
Hardness Of Tread	80±5° Shore A
Load Capacity (Dynamic)	90kgs
Load Capacity (Static)	135kgs
Temperature	-20°C to +120°C
Fork Type	Swivel Caster
Stainless	Y
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.85kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ○ ○
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ○

Dimensions

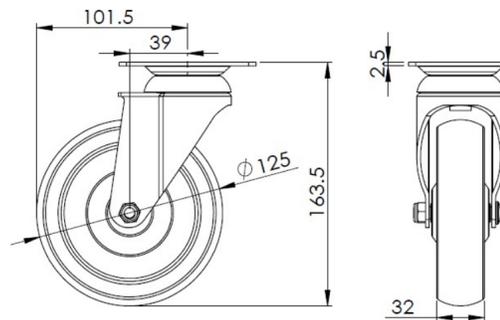

Mounting

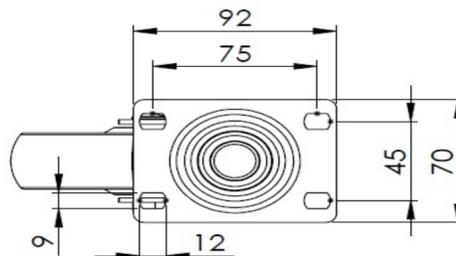

* For any deviation between metric and imperial spec, please refer to the metric spec.