

1116-SS-MI Medium Duty Institutional Stainless Steel Caster Series



Rubber wheel (black) Wheel diameter × wheel width 125 x 32mm

EAN

TW-4111605002058

Swivel Casters, Riveted and Stamping Top Plate brackets—high-grade perforated surface; vibratory surface, Mounting Type - Top Plate device; High-Quality Resilient Rubber Wheel Center, Wheel Tread; black, wheels—Plain Bearing.



Picture may differ from original product

Wheel surface: High-quality elastic rubber wheels

Wheel Center: High-quality elastic rubber wheel

Drawings are for reference only and may differ from the product

Technical Data


Imperial Metric

Wheel Diameter	5 "
Wheel Width	6-11/32 "
Wheel Bearing	Wheel With Plain Bearing
Plate Size	3-5/8 " x 2-13/16 "
Bolt Hole Spacing	3 " x 1-13/16 "
Plate Hole	1/2 " x 23/64 "
Offset	1-9/16 "
Swivel Interference	8 "
Overall Height	6-1/2 "
Swivel Radius	4 "
Hardness Of Tread	80±5° Shore A
Load Capacity (Dynamic)	198lbs
Load Capacity (Static)	298lbs
Temperature	-4°F to +248°F
Fork Type	Swivel Caster
Stainless	Y
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	1.9lbs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ○ ○
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ○

Dimensions

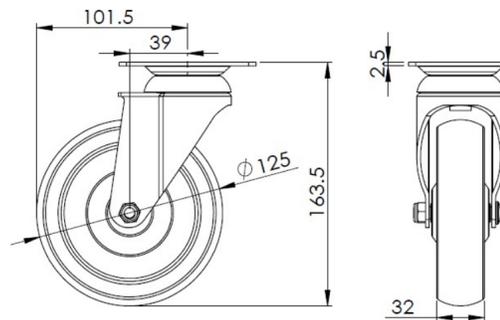

Mounting

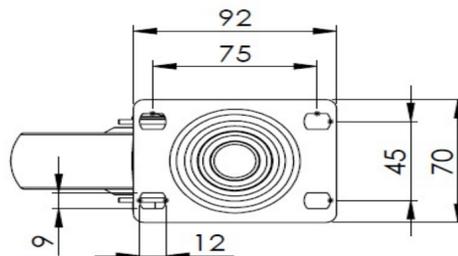

* For any deviation between metric and imperial spec, please refer to the metric spec.