

# 1116-SS-MI Medium Duty Institutional Stainless Steel Caster Series



PU (red) Wheel Diameter × Wheel Width 125 x 40mm

EAN

TW-4111605002062

Swivel Casters, Riveted and Stamping Top Plate; surface vibration, Mounting Type - Top Plate device; cast iron Wheel Center, High Quality Polyurethane Wheel Tread; red, Bearing—Ball Bearings.

Wheel surface: High-quality polyurethane  
Wheel Center: Iron core / Cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

## Technical Data


Metric  Imperial

Wheel Diameter	125mm
Wheel Width	40mm
Wheel Bearing	Wheels With Ball Bearings
Plate Size	91 x 91mm
Bolt Hole Spacing	70 x 70mm
Plate Hole	13 x 10.5mm
Offset	41mm
Swivel Interference	206mm
Overall Height	158mm
Swivel Radius	103mm
Hardness Of Tread	92±5° Shore A
Load Capacity (Dynamic)	150kgs
Load Capacity (Static)	225kgs
Temperature	-20°C to +70°C
Fork Type	Swivel Caster
Stainless	Y
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	2.0kgs
Standard	ISO22883


## Advantages at a glance

Rolling Resistance	● ● ● ○ ○
Operating Noise	● ● ● ○
Floor Surface Preservation	● ● ● ○

## Dimensions

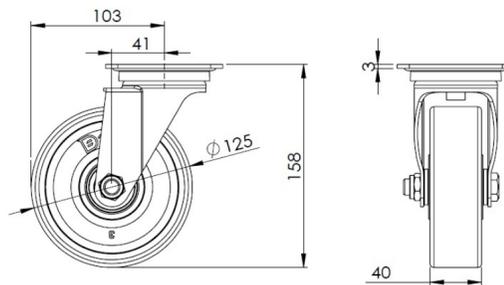

## Mounting

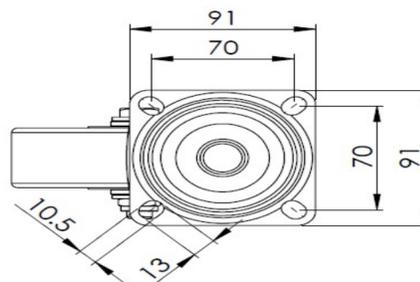

\* For any deviation between metric and imperial spec, please refer to the metric spec.