

1116-SS-B Type B Stainless Steel Series

PU wheel (red) Wheel diameter x wheel width 150 x 42mm


EAN

TW-4111606001003

Rigid Casters, Welded Caster Fork; surface vibration, Mounting Type - Top Plate device; cast iron Wheel Center, High Quality Polyurethane Wheel Tread; red, Bearing—Ball Bearings.

Wheel surface: High-quality polyurethane
Wheel Center: Iron core / Cast iron core

Drawings are for reference only and may differ from the product

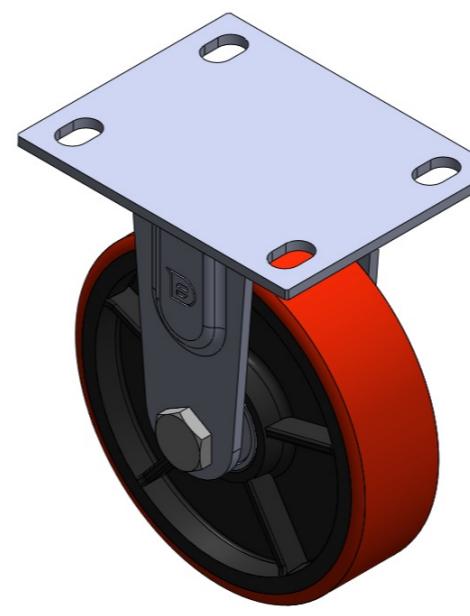

Picture may differ from original product

Technical Data

 Metric Imperial

Wheel Diameter 150mm

Wheel Width 42mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 140 x 110mm

Bolt Hole Spacing 110x75mm

Plate Hole 20 x 13mm

Overall Height 185mm

Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic) 410kgs

Load Capacity (Static) 615kgs

Temperature -20°C to +70°C

Fork Type Rigid Caster

Stainless Y

Electrical Conductivity N/A

Anti-Static N/A


Weight 2.90kgs

Standard ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ○ ○
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ○

Dimensions

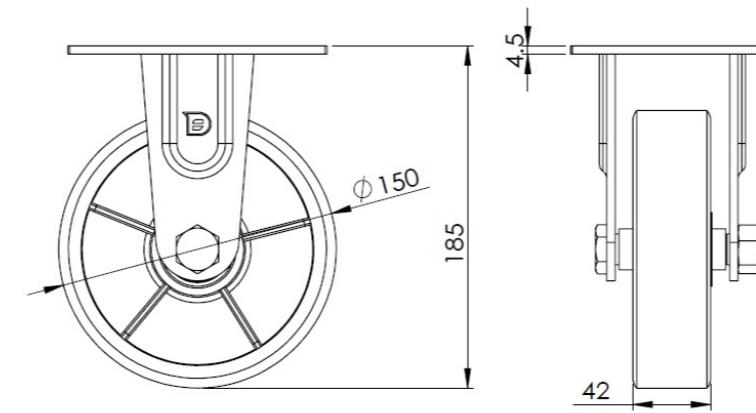

Mounting

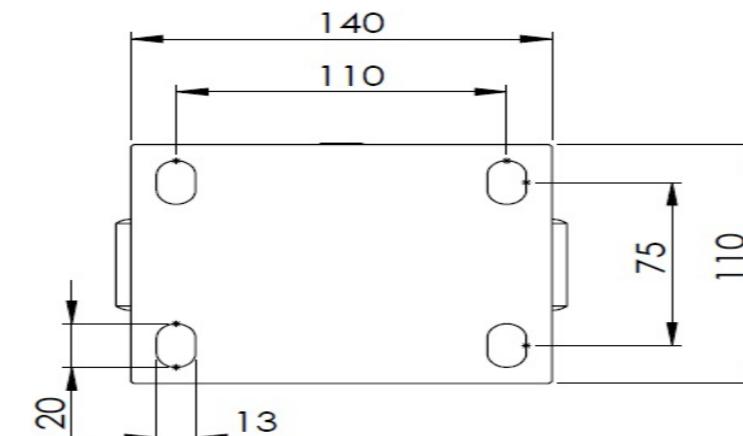

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com